


8-Channel, 24-bit Digitally-Encoded
Audio Transmitter / Receiver**FEATURES:**

- 8 Channels of real-time 24-Bit, uni-directional Audio
- Expandable to 16 channels of uni-directional Audio
- 10Hz to 20KHz audio bandwidth
- Greater than 90dB SNR for superb audio quality
- Wide Optical Dynamic Range: Eliminates Need For Optical Attenuators
- Laser Based Systems for Multimode and Singlemode
- Surface Mount Technology (SMT) for High Reliability and Repeatability
- *SpectraSmart™* Network Management Compatible
- Local LED Status Indicators to Monitor Critical System Diagnostics for Performance Parameters
- ST, FC Optical Connector
- Hot Swappable Cards
- Laser Back - Biased Photo Detector Circuitry for Stable Optical Output Over Full Temperature Range
- DB 9 Type Connectors for Audio

DESCRIPTION:

The DT/DR-8A series products incorporate digital encoding technology. This fiber optic module transmits 8 channels of 24-Bit quality Audio over one fiber. User-selectable input/output impedances of 600 Ohm, balanced and 47K Ohm, unbalanced are available for each channel. Both multimode and singlemode fiber versions are available. Meridian's digital product line incorporates plug-in personality signal cards to easily configure a wide variety of module types. The functionality of the DT/DR-8A series products is enhanced by its compatibility with Meridian's PC based *SpectraSmart* Network Management & Diagnostic Software system. *Spectra Smart* supervises the operating parameters of the transmission system such as the status on Video levels, Sync, Digital carrier detect, Voltages, Temperatures, Optical levels etc. See *Spectra Smart* brochure for further details.

CONFIGURATIONS:

The DT/DR-8A product family is available as rack mount cards and modules that can be installed in Meridian's card chassis, desk chassis and 19" racking frames. This system can be configured in either star (module to rack) or trunking (rack to rack) configurations. These systems can be made a standalone system by using the SR-1000/s, 2 slot desk / wall mount chassis (87VAC-264VAC).

MARKETS:

- √ Pro Audio
- √ Courtroom & broadcast audio feeds
- √ Distance Learning

SPECIFICATIONS:

Audio

In/Out Impedance	600 Ohms (Bal. / Un Bal.)
Frequencet Response	10Hz to 20KHz
SNR	>90dB (Weighted) @ 1KHz.
In / Out Level	-6 to +6 dBm (4VP-Pmax.) (+18dBm available on Request)
Total Harmonic Distortion	< 0.01% @ 1 KHz
Resolution	24 Bit

Optical

Fiber Data Rate	250Mbps
-----------------	---------

Connectors

Optical	ST, FC
Audio	DB9 Female

Power **

Card	8 Watts
------	---------

Enviromental

Operating Temperature	-40oC to +75oC
Storage Temperature	-55oC to +85oC
Relative Humidity	0 to 95% Non-condensing

Quality

MTBF	>220,000 hours @ Ground Fix 35oC per MIL217F
------	---


Indicators (LEDs)

1 - Green	Power On
1 - Bi-color	TX Carrier/ Laser Over Current
1 - Bi-color	RX Carrier - Present / Error
1 - Bi-color	RX optical signal - Present / Absent
8 - Red	Audio Overload
8 - Green	Audio Present


Physical

Dimensions:	
Card	160 mm (6.3") L, 100 mm (4") W 44 mm (1.7") H
Weight:	
Card	450 gms (16 Oz)
No. of Slots	2

Part Numbers:

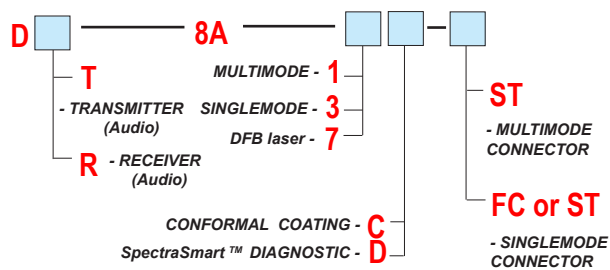

** Due to variations of drivers and diagnostic options, power shown @ max value

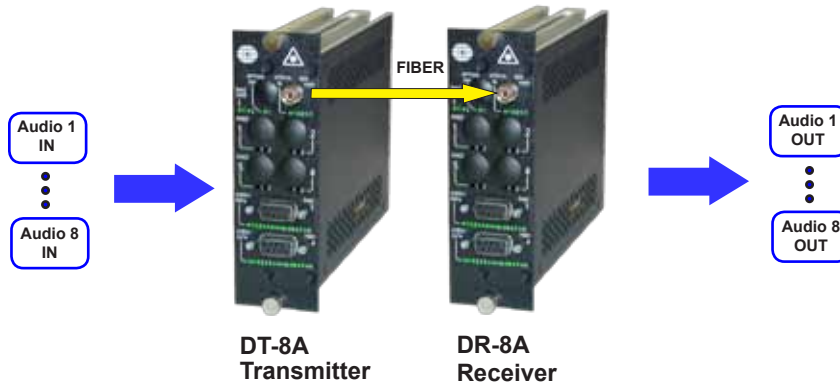

OPTICAL:

Fiber Type/Size (um)	Optical Output (dBm)	Receiver Sensitivity (dBm)	Optical Budget (dB)	Wavelength (nm)	Optical Connector	Optical Dynamic Range (dB)
Multimode (FP Laser) 62.5 / 125	-3	-23	20	1300	ST	24
Singlemode (FP Laser) 9 / 125	-3	-23	20	1310	ST, FC	24
Singlemode (DFB Laser) 9 / 125	+3	-23	26	1550	ST, FC	24

Meridian Technologies Inc.

700 Elmont Road. • Elmont, NY 11003 • 516. 285. 1000 • FAX 516. 285. 6300 • E-mail sales@meridian-tech.com
www.meridian-tech.com

ver 12/2011