


ST-1B1C2G/1B2G-X

PINOUT DIAGRAM

STATUS INDICATORS

- PWR - POWER (GREEN)
- DIAG - NA
- TX C/L - TX CARRIER (GREEN)
/OVERLOAD (RED)
- RX C/E - RX CARRIER (GREEN)
/ERROR (RED)
- SYN - NA
- VID - NA

- DR1 - (CH.1) DATA OUTPUT
- DR2 - (CH.2) DATA OUTPUT
- AR1 - (CH.1) AUDIO OUTPUT
- AR2 - NA
- CR1 - NA
- CR2 - NA
- DT1 - (CH.1) DATA INPUT
- DT2 - (CH.2) DATA INPUT
- AT1 - (CH.1) AUDIO INPUT
- AT2 - NA
- CT1 - (CH.1) C/C INPUT
- CT2 - NA

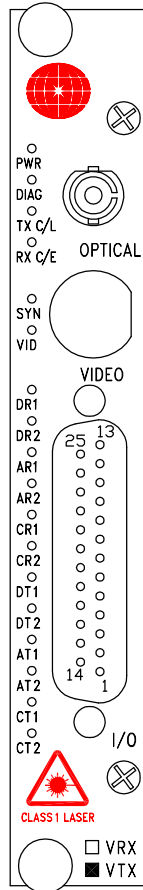

OPTICAL PORT (ST, FC)

AUDIO/DATA INPUT/OUTPUT (DB-25 FEMALE)

- 22. (CH.1) AUDIO INPUT / OUTPUT
- 6. (CH.1) CC INPUT
- 4. (CH.1) RS232 INPUT / RS422 INPUT- / RS485 INPUT-
- 16. (CH.1) RS422 INPUT+ / RS485 INPUT+
- 2. (CH.2) RS422 INPUT-
- 14. (CH.2) RS422 INPUT+
- 5. (CH.1) RS232 OUTPUT / RS422 OUTPUT- / RS485 OUTPUT-
- 17. (CH.1) RS422 OUTPUT+ / RS485 OUTPUT+
- 3. (CH.2) RS422 OUTPUT-
- 15. (CH.2) RS422 OUTPUT+
- 19. +5V
- 1. GND
- 7. GND


SR-1B1C2G/1B2G-X

PINOUT DIAGRAM

STATUS INDICATORS

- PWR - POWER (GREEN)
- DIAG - NA
- TX C/L - TX CARRIER (GREEN)
/OVERLOAD (RED)
- RX C/E - RX CARRIER (GREEN)
/ERROR (RED)
- SYN - NA
- VID - NA

- DR1 - (CH.1) DATA OUTPUT
- DR2 - (CH.2) DATA OUTPUT
- AR1 - (CH.1) AUDIO OUTPUT
- AR2 - NA
- CR1 - (CH.1) C/C OUTPUT
- CR2 - NA
- DT1 - (CH.1) DATA INPUT
- DT2 - (CH.2) DATA INPUT
- AT1 - (CH.1) AUDIO INPUT
- AT2 - NA
- CT1 - NA
- CT2 - NA

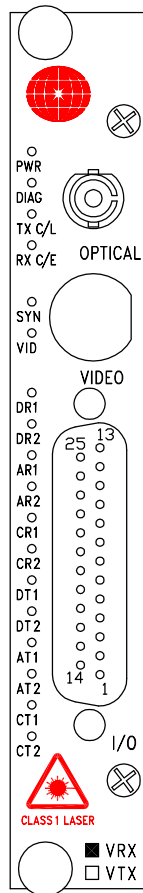

OPTICAL PORT (ST, FC)

AUDIO/DATA INPUT/OUTPUT (DB-25 FEMALE)

- 22. (CH.1) AUDIO INPUT / OUTPUT
- 20. (CH.1) CC OUTPUT-
- 8. (CH.1) CC OUTPUT+
- 4. (CH.1) RS232 INPUT / RS422 INPUT- / RS485 INPUT-
- 16. (CH.1) RS422 INPUT+ / RS485 INPUT+
- 2. (CH.2) RS422 INPUT-
- 14. (CH.2) RS422 INPUT+
- 5. (CH.1) RS232 OUTPUT / RS422 OUTPUT- / RS485 OUTPUT-
- 17. (CH.1) RS422 OUTPUT+ / RS485 OUTPUT+
- 3. (CH.2) RS422 OUTPUT-
- 15. (CH.2) RS422 OUTPUT+
- 19. +5V
- 1. GND
- 7. GND