


ST-1U1G/1G-X ST-1W1G/1G-X

PINOUT DIAGRAM

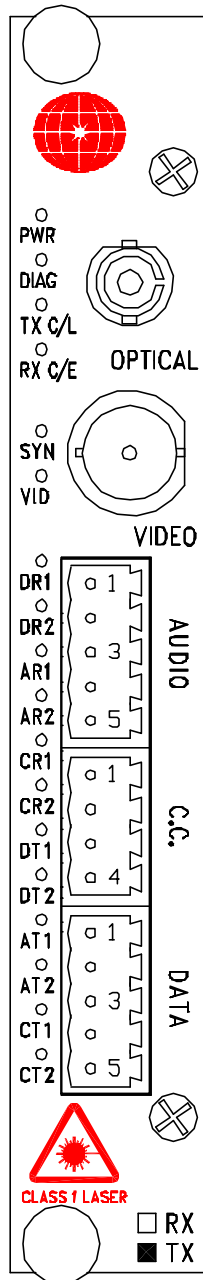

STATUS INDICATORS

- DR1 - (CH.1) DATA OUTPUT
- DR2 - NA
- AR1 - NA
- AR2 - NA
- CR1 - NA
- CR2 - NA
- DT1 - (CH.1) DATA INPUT
- DT2 - NA
- AT1 - NA
- AT2 - NA
- CT1 - NA
- CT2 - NA

OPTICAL PORT (ST, FC)

STATUS INDICATORS

PWR - POWER (GREEN)

DIAG - NA

TX C/L - TX CARRIER (GREEN) / OVERLOAD (RED)

RX C/E - RX CARRIER (GREEN) / ERROR (RED)

VIDEO INPUT

STATUS INDICATORS

SYN - SYNC PRESENT (GREEN)

VID - VIDEO PRESENT (GREEN) / OVERLOAD (RED)

DATA MULTI PROTOCOL DIGITAL PINOUT DIAGRAM


PIN #	RS-232	RS-422	RS-485 2W	RS-485 4W
1	CH1 IN (RD)	CH1 IN-	CH1 IN/OUT-	CH1 IN-
2		CH1 IN+	CH1 IN/OUT+	CH1 IN+
3	CH1 OUT (TD)	CH1 OUT-		CH1 OUT-
4		CH1 OUT+		CH1 OUT+
5	GND	GND	GND	GND

*U-10MHz, 10 BIT VIDEO

*W-10 BIT VIDEO

SR-1U1G/1G-X SR-1W1G/1G-X

PINOUT DIAGRAM

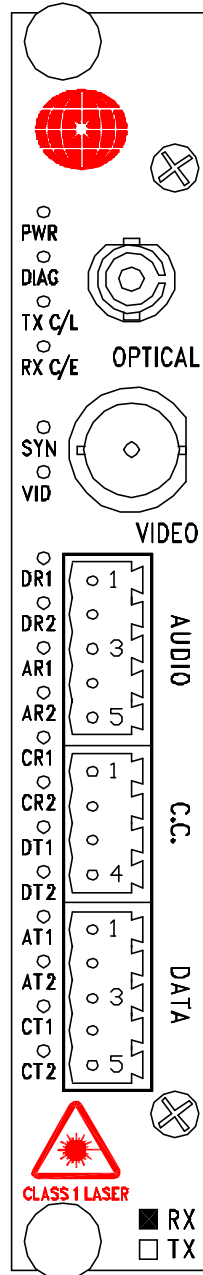

STATUS INDICATORS

DR1 - <CH.1> DATA OUTPUT
 DR2 - NA
 AR1 - NA
 AR2 - NA
 CR1 - NA
 CR2 - NA
 DT1 - <CH.1> DATA INPUT
 DT2 - NA
 AT1 - NA
 AT2 - NA
 CT1 - NA
 CT2 - NA

OPTICAL PORT (ST, FC)

STATUS INDICATORS

PWR - POWER (GREEN)
 DIAG - NA
 TX C/L - TX CARRIER (GREEN) / OVERLOAD (RED)
 RX C/E - RX CARRIER (GREEN) / ERROR (RED)

VIDEO OUTPUT

STATUS INDICATORS

SYN - SYNC PRESENT (GREEN)
 VID - VIDEO PRESENT (GREEN) / OVERLOAD (RED)

DATA MULTI PROTOCOL DIGITAL PINOUT DIAGRAM

PIN #	RS-232	RS-422	RS-485 2W	RS-485 4W
1	CH1 IN (RD)	CH1 IN-	CH1 IN/OUT-	CH1 IN-
2		CH1 IN+	CH1 IN/OUT+	CH1 IN+
3	CH1 OUT (TD)	CH1 OUT-		CH1 OUT-
4		CH1 OUT+		CH1 OUT+
5	GND	GND	GND	GND

*U-10MHz, 10 BIT VIDEO

*W-10 BIT VIDEO