


# ST-1W1A1G/1G-X

## PINOUT DIAGRAM

### STATUS INDICATORS

- PWR - POWER (GREEN)
- DIAG - NA
- TX C/L - TX CARRIER (GREEN)  
/OVERLOAD (RED)
- RX C/E - RX CARRIER (GREEN)/ERROR (RED)
- SYN - SYNC PRESENT (GREEN)
- VID - VIDEO PRESENT (GREEN)/ OVERLOAD (RED)

- DR1 - NA
- DR2 - NA
- AR1 - (CH.1) AUDIO OUTPUT
- AR2 - NA
- CR1 - NA
- CR2 - NA
- DT1 - (CH.1) DATA INPUT
- DT2 - NA
- AT1 - (CH.1) AUDIO INPUT
- AT2 - NA
- CT1 - NA
- CT2 - NA

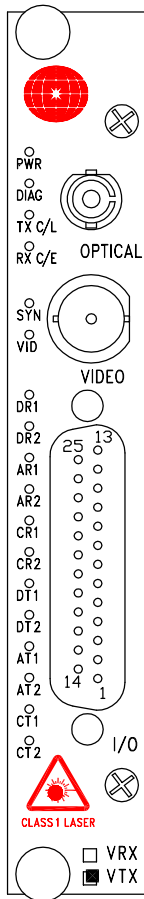

OPTICAL PORT (ST, FC)

VIDEO INPUT

AUDIO/DATA INPUT/OUTPUT  
(DB-25 FEMALE)

- 22. (CH.1) AUDIO INPUT-
- 10. (CH.1) AUDIO INPUT+
- 4. (CH.1) RS232 INPUT / (CH.1) RS422 INPUT- / RS485 INPUT-
- 16. (CH.1) RS422 INPUT+ / RS485 INPUT+
- 5. (CH.1) RS232 OUTPUT / (CH.1) RS422 OUTPUT- /RS485 OUTPUT-
- 17. (CH.1) RS422 OUTPUT+ / RS485 OUTPUT+
- 1. GND
- 7. GND


# SR-1W1A1G/1G-X

## PINOUT DIAGRAM

### STATUS INDICATORS

- PWR - POWER (GREEN)
- DIAG - NA
- TX C/L - TX CARRIER (GREEN)  
/OVERLOAD (RED)
- RX C/E - RX CARRIER  
(GREEN)/ERROR (RED)
- SYN - SYNC PRESENT (GREEN)
- VID - VIDEO PRESENT  
(GREEN)/ OVERLOAD (RED)

- DR1 - (CH.1) DATA OUTPUT
- DR2 - NA
- AR1 - (CH.1) AUDIO OUTPUT
- AR2 - NA
- CR1 - NA
- CR2 - NA
- DT1 - NA
- DT2 - NA
- AT1 - (CH.1) AUDIO INPUT
- AT2 - NA
- CT1 - NA
- CT2 - NA

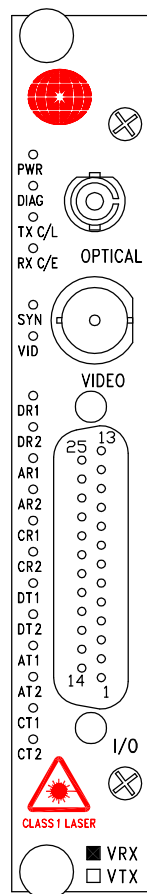

OPTICAL PORT (ST, FC)

VIDEO OUTPUT

AUDIO/DATA INPUT/OUTPUT  
(DB-25 FEMALE)

- 12. (CH.1) AUDIO OUTPUT-
- 24. (CH.1) AUDIO OUTPUT+
- 4. (CH.1) RS232 INPUT / (CH.1) RS422 INPUT- / RS485 INPUT-
- 16. (CH.1) RS422 INPUT+ / RS485 INPUT+
- 5. (CH.1) RS232 OUTPUT / (CH.1) RS422 OUTPUT- /RS485 OUTPUT-
- 17. (CH.1) RS422 OUTPUT+ / RS485 OUTPUT+
- 1. GND
- 7. GND