


ST-1W2G/2G-X

PINOUT DIAGRAM

STATUS INDICATORS

- PWR - POWER (GREEN)
- DIAG - NA
- TX C/L - TX CARRIER (GREEN)
/OVERLOAD (RED)
- RX C/E - RX CARRIER
(GREEN)/ERROR (RED)
- SYN - SYNC PRESENT (GREEN)
- VID - VIDEO PRESENT
(GREEN)/ OVERLOAD (RED)

- DR1 - (CH.1) DATA OUTPUT
- DR2 - (CH.2) DATA OUTPUT
- AR1 - NA
- AR2 - NA
- CR1 - NA
- CR2 - NA
- DT1 - (CH.1) DATA INPUT
- DT2 - (CH.2) DATA INPUT
- AT1 - NA
- AT2 - NA
- CT1 - NA
- CT2 - NA

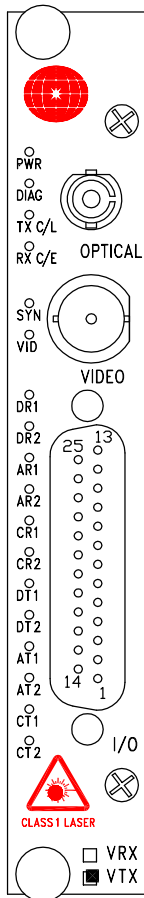

OPTICAL PORT (ST, FC)

VIDEO INPUT

DATA INPUT/OUTPUT
(DB-25 FEMALE)

4. (CH.1) RS232 INPUT / (CH.1) RS422 INPUT- / RS485 INPUT-
16. (CH.1) RS422 INPUT+ / RS485 INPUT+
2. (CH.2) RS232 INPUT / (CH.2) RS422 INPUT-
14. (CH.2) RS422 INPUT+
5. (CH.1) RS232 OUTPUT / (CH.1) RS422 OUTPUT- / RS485 OUTPUT-
17. (CH.1) RS422 OUTPUT+ / RS485 OUTPUT+
3. (CH.2) RS232 OUTPUT / (CH.2) RS422 OUTPUT-
15. (CH.2) RS422 OUTPUT+
1. GND
7. GND


SR-1W2G/2G-X

PINOUT DIAGRAM

STATUS INDICATORS

PWR - POWER (GREEN)
 DIAG - NA
 TX C/L - TX CARRIER (GREEN)
 /OVERLOAD (RED)
 RX C/E - RX CARRIER
 (GREEN)/ERROR (RED)
 SYN - SYNC PRESENT (GREEN)
 VID - VIDEO PRESENT
 (GREEN)/ OVERLOAD (RED)

DR1 - (CH.1) DATA OUTPUT
 DR2 - (CH.2) DATA OUTPUT
 AR1 - NA
 AR2 - NA
 CR1 - NA
 CR2 - NA
 DT1 - (CH.1) DATA INPUT
 DT2 - (CH.2) DATA INPUT
 AT1 - NA
 AT2 - NA
 CT1 - NA
 CT2 - NA

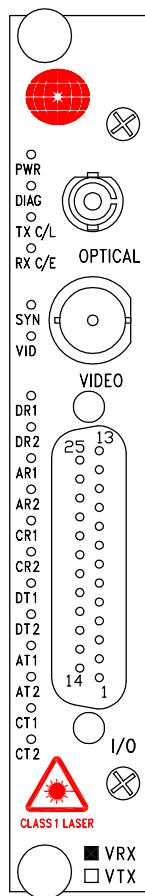

OPTICAL PORT (ST, FC)

VIDEO OUTPUT

DATA INPUT/OUTPUT
(DB-25 FEMALE)

4. (CH.1) RS232 INPUT / (CH.1) RS422 INPUT- / RS485 INPUT-
16. (CH.1) RS422 INPUT+ / RS485 INPUT+
2. (CH.2) RS232 INPUT / (CH.2) RS422 INPUT-
14. (CH.2) RS422 INPUT+
5. (CH.1) RS232 OUTPUT / (CH.1) RS422 OUTPUT- / RS485 OUTPUT-
17. (CH.1) RS422 OUTPUT+ / RS485 OUTPUT+
3. (CH.2) RS232 OUTPUT / (CH.2) RS422 OUTPUT-
15. (CH.2) RS422 OUTPUT+
1. GND
7. GND