

Digitally-Encoded Two Bi-directional 8-Bit Video and Two Bi-directional RS-422 Data Channels



FEATURES:

- 8-Bit Video Digital Encoding
- Real Time Video / Data
- RS-422 Data
- 7 MHz Video Bandwidth
- Meets RS-250C Short Haul Transmission Specifications
- NTSC, PAL, SECAM Compatible
- Wide Optical Dynamic Range: Eliminates Need For Optical Attenuators
- Laser Based Systems for Multimode and Singlemode
- Surface Mount Technology (SMT) for High Reliability and Repeatability
- SpectraSmart™ Network Management Compatible
- Local LED Status Indicators to Monitor Critical System Diagnostics for Performance Parameters
- ST, FC Optical Connector
- Hot Swappable Cards
- Laser Back - Biased Photo Detector Circuitry for Stable Optical Output Over Full Temperature Range
- 75 Ohm BNC Video Connector (Gold Center Pin)
- Meets EIA RS-170, RS-343A Formats
- DB 9 Type Connectors for Data
- DC to 125 Kb/s Data Rate

DESCRIPTION:

The DX-2V2F series products incorporate digital encoding technology. This fiber optic module transmits the following bi-directional (full duplex) signals: two real-time, high performance 8-bit digitally encoded Video channels, and two RS-422 data channels fiber. Both multimode and singlemode fiber versions are available. Meridian's digital product line incorporates plug-in personality signal cards to easily configure a wide variety of module types. The functionality of the DX-2V2F series products are enhanced by their compatibility with Meridian's PC based SpectraSmart Network Management & Diagnostic Software system. SpectraSmart supervises the operating parameters of the transmission system such as the status on video levels, sync, digital carrier detect, voltages, temperatures, optical levels etc. See SpectraSmart brochure for further details.

CONFIGURATIONS:

The DX-2V2F product family is available as rack mount cards and modules that can be installed in Meridian's card chassis, desk chassis and 19" racking frames. This system can be configured in either star (module to rack) or trunking (rack to rack) configurations. These systems can be made a standalone system by using the SR-1000/s, 2 slot desk / wall mount chassis (87VAC-264VAC)

MARKETS:

- √ Video conferencing
- √ Intelligent transportation systems (ITS)
- √ Security and surveillance
- √ Access Control

SPECIFICATIONS:

Video

Format	NTSC, PAL, SECAM
Voltage/Impedance	1 Vp-p, 75 Ohm, 1.5 Vp-p max.
Bandwidth	5 Hz to 6.8 MHz @ -3 dB
Differential Gain	<0.6%
Differential Phase	<0.3o
SNR	>60 dB (weighted)*
Return Loss	>30 dB
Field Tilt	< 0.5%

Indicators (LEDs)

1 - Green	Power On
1 - Bi-color	TX Carrier/ Laser Over Current
1 - Bi-color	RX Carrier - Present / Error
1 - Bi-color	RX optical signal - Present / Absent
4 - Bi-color	Video Present / Overload
4 - Green	Sync. Present
4 - Green	Data Present

Data

Formats	RS-422, Manchester, Bi-Phase
Rate	DC to 1Mb/s
Bit Error Rate	10 ⁻⁹ *

Physical

Dimensions:	
Card	160 mm (6.3") L, 100 mm (4") W 44 mm (1.7") H
Weight:	
Card	450 gms (16 Oz)
No. of Slots	2

Optical

Fiber Data Rate	500 Mb/s
-----------------	----------

Connectors

Video.	75 Ohm BNC (Gold Center Pin)
Optical	ST, FC
Power	See SR-1000 Brochure for details
Data	DB9 Female


Environmental

Operating Temperature	-34oC to +74oC
Storage Temperature	-55oC to +85oC
Relative Humidity	0 to 95% Non-condensing

Quality

MTBF	>240,000 hours @ Ground Fix 35oC per MIL217F
------	---

Part Numbers:

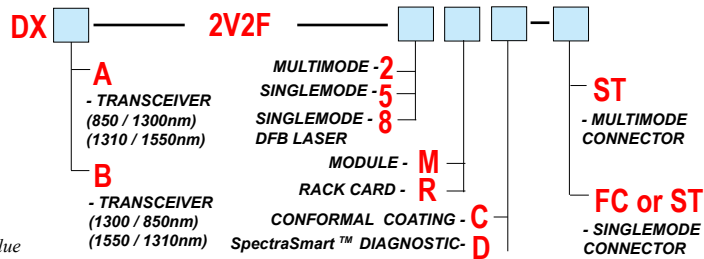


Power **

Card	9 Watts
------	---------

* measured @ max. optical budget

** Due to variations of drivers and diagnostic options, power shown @ max value

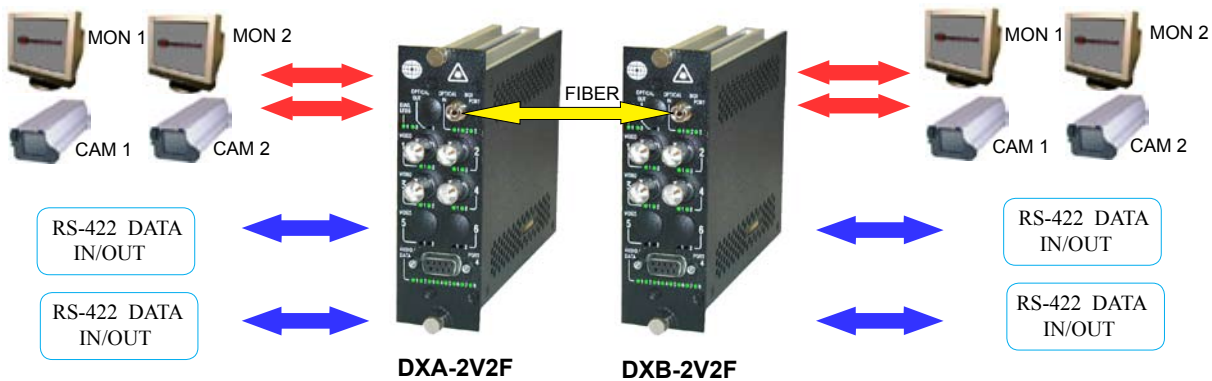

OPTICAL:

Fiber Type/Size (um)	Optical Output (dBm)	Receiver Sensitivity (dBm)	Optical Budget (dB)	Wavelength (nm)	Optical Connector	Optical Dynamic Range (dB)
Multimode (FP Laser) 62.5 / 125	-3	-24	21	1300 / 850	ST	24
Singlemode (FP Laser) 9 / 125	-3	-24	21	1310 / 1550	ST, FC	24
Singlemode (DFB Laser) 9 / 125	+3	-24	27	1310 / 1550	ST, FC	24

Meridian Technologies Inc.

700 Elmont Road. • Elmont, NY 11003 • 516. 285. 1000 • FAX 516. 285. 6300 • E-mail sales@meridian-tech.com

Visit our web side: www.meridian-tech.com

09/05 - Ver 1.0