


Digitally Encoded 2 Unidirectional Audio Channels



FEATURES:

- Two Unidirectional Channels of 24 Bit Digitally Encoded Audio over one Fiber
- Laser Based Systems for Multimode and Singlemode Fiber
- Surface Mount Technology (SMT) for High Reliability and Repeatability
- *SpectraSmart* Network Management Compatible
- Local LED Status Indicators to Monitor Critical System Diagnostics and Performance Parameters
- ST, FC Optical Connector
- Hot Swappable Rack Cards
- Back - Biased Photo Detector Circuitry for Stable Optical Laser Output Over Full Temperature Range
- Meets NEMA TS1 / TS2 & CALTRANS Specifications.
- Utilizes Internal Switching Power Supplies
- Automatically Resettable Solid-State Current Limiters on All Power Lines: Provides Equipment Protection
- Wide Optical Dynamic Range: Optical Attenuators are Never Needed
- 3-pin Screw Terminal Connectors for Audio

DESCRIPTION:

This module in the **SA** product family incorporates all-digital encoding technology and transmits/receives two, 24-bit uni-directional audio channels over one optical fiber. Local indicators provide visual operational of each audio channel. Convenient 3-pin terminal blocks are used for easy connection of the audio channel interfaces. These single fiber, laser based systems are available in both, Multimode and Singlemode modules. The **SA** series is also compatible with Meridian's *SpectraSmart* Network management and diagnostic PC based system. See the *SpectraSmart* brochure for additional details.

CONFIGURATIONS:

The **SA** product family is available as rack mount cards and modules that can be installed in any of Meridian's desk chassis or in 19" racking frames. This system can be configured in either star (module to rack) or trunking (rack to rack) configurations. These systems can be transformed in to a standalone module by utilizing an SR-500/S (standard configuration) or an SR-1000/S.

MARKETS:

- ✓ Intelligent transportation systems (ITS)
- ✓ Security and surveillance
- ✓ Access Control

SPECIFICATIONS:

Audio

I/O Impedance 600 Ohm (Bal.), 47 KOhm (Un Bal.)
 Frequency Response 10 Hz to 20 KHz
 SNR >90dB (Weighted)@ 1 KHz
 In/Out Level -8 to +8 dBm (4V_{rms} max.)
 (+18 dBm available on request)
 Total Harmonic Distortion <0.01% @ 1KHz
 Resolution 24 Bit

Optical

Fiber Data Rate 250 Mb/s

Connectors

Video 75 Ohm BNC (Gold Center Pin)
 ST, FC
 Optical See SR-500 Brochure for details
 Power (module) 3-pin Screw Terminal Blocks
 Audio

Power **

Card 6 Watts

Indicators (LEDs)

1 - Green Power On
 1 - Bi-color TX Carrier/ Laser Over Current
 1 - Bi-color RX Carrier - Present / Error
 2 - Bi-color Audio Present / Overmodulation

Physical

Dimensions (Card) 160 mm (6.3") L, 127 mm (5") W
 20mm (0.80") W
 Weight (Card) 450 gms (16 Oz)
 No. of Slots 1
 Module See SR-500 Brochure


Environmental

Operating Temperature ... -34°C to +74°C
 Storage Temperature -55°C to +85°C
 Relative Humidity 0 to 95% Non-condensing


Quality

MTBF >170,000 hours @ Ground Fix
 35°C per MIL217F

Part Numbers:

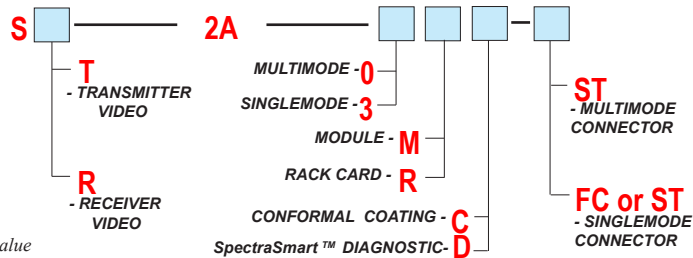

* measured @ max. optical budget
 ** Due to variations of drivers and diagnostic options, power shown @ max value

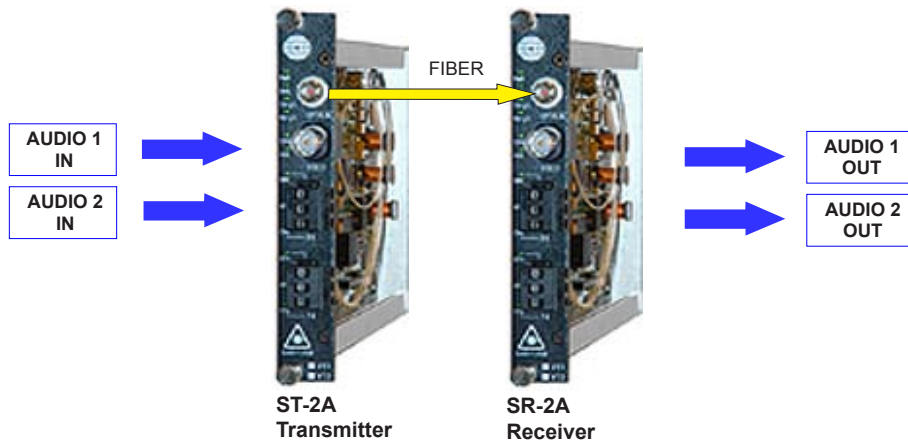

OPTICAL:

Fiber Type/Size (um)	Optical Output (dBm)	Receiver Sensitivity (dBm)	Optical Budget (dB)	Wavelength (nm)	Optical Connector	Optical Dynamic Range (dB)
Multimode (FP Laser) 62.5 / 125	-5	-26	21	1300 / 850	ST	24
Singlemode (FP Laser) 9 / 125	-5	-26	21	1310 / 1550	ST, FC	24