



**NOTES:**

1. EARS CAN BE RELOCATED, FROM BACK TO FRONT
2. FOUR MOUNTING HOLES, MAX 1/4-20 SCREW
3. PERFORATED SHIELD MUST BE UP (TOP OF RACK)
4. POWER CONSUMPTION MAX. 80 WATTS @120VAC
5. UNIT MOUNTING FOR HEAT VENTING.. TOP 6" MIN. BOTH SIDES 4" MIN, BOTTOM 12" MIN.

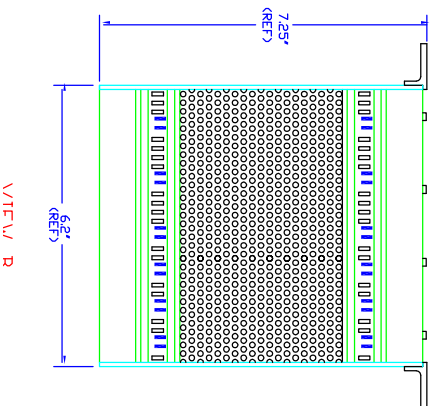

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES # XX ± .01 # XXX .005		APPROVALS		DATE		 700 Elmont Road, Elmont, NY 11003	
MATERIAL:		DRAWN	J. KRUL	6/93	TITLE	SR1200S MINI SUBRACK MECHANICAL DWG	
FINISH:		CHECKED	J. KRUL	6/93	SIZE	FILE NO.	DWG. NO.
		ISSUED			D	MICROSUB	98-041-01201
							REV.