

DT-1V(W)1F/1F-X

PINOUT DIAGRAM

STATUS INDICATORS

1. POWER (GREEN)
2. NA

STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)


VIDEO INPUT (CH.1)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

DATA RS422 IN/OUT (PORT 4) (DB-9 FEMALE)

1. (CH.1) INPUT +
2. (CH.1) INPUT -
3. NA
4. NA
5. GND
6. (CH.1) OUTPUT +
7. (CH.1) OUTPUT -
8. NA
9. NA

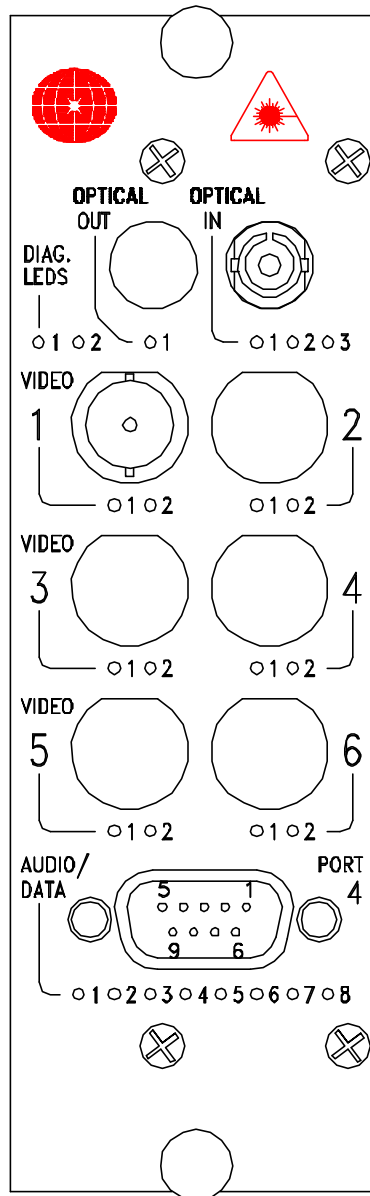

OPTICAL PORT

STATUS INDICATORS

1. NA
2. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
3. RX CARRIER (GREEN)/ERROR (RED)

STATUS INDICATORS (PORT 4)

1. (CH.1) DATA INPUT
2. NA
3. NA
4. NA
5. NA
6. (CH.1) DATA OUTPUT
7. NA
8. NA

DR-1V(W)1F/1F-X

PINOUT DIAGRAM

STATUS INDICATORS

1. POWER (GREEN)
2. NA

STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)


VIDEO OUTPUT (CH.1)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

DATA RS422 IN/OUT (PORT 4) (DB-9 FEMALE)

1. (CH.1) OUTPUT +
2. (CH.1) OUTPUT -
3. NA
4. NA
5. GND
6. (CH.1) INPUT +
7. (CH.1) INPUT -
8. NA
9. NA

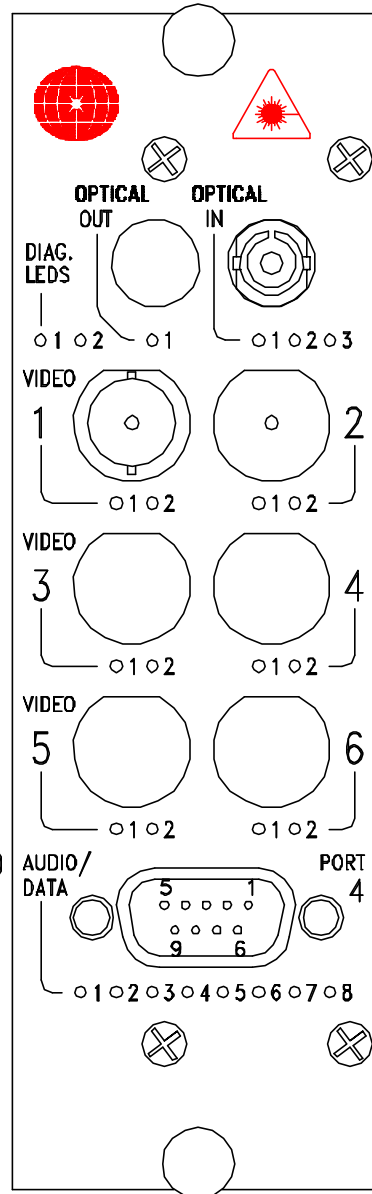

OPTICAL PORT

STATUS INDICATORS

1. NA
2. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
3. RX CARRIER (GREEN)/ERROR (RED)

STATUS INDICATORS (PORT 4)

1. NA
2. (CH.1) DATA OUTPUT
3. NA
4. NA
5. (CH.1) DATA INPUT
6. NA
7. NA
8. NA