

DT-2V(W)6A1D/2A1D-X

PINOUT DIAGRAM

STATUS INDICATORS

1. POWER (GREEN)
2. NA

STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)

VIDEO INPUT (CH.1)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

AUDIO INPUT/OUTPUT (PORT 2) (DB-9 FEMALE)


1. (CH.1) OUTPUT-
2. (CH.1) OUTPUT+
3. (CH.2) OUTPUT-
4. (CH.2) OUTPUT+
5. GND
6. (CH.1) INPUT-
7. (CH.1) INPUT+
8. (CH.2) INPUT-
9. (CH.2) INPUT+

AUDIO INPUT (PORT 3) (DB-9 FEMALE)

1. (CH.3) INPUT-
2. (CH.3) INPUT+
3. (CH.4) INPUT-
4. (CH.4) INPUT+
5. GND
6. (CH.5) INPUT-
7. (CH.5) INPUT+
8. (CH.6) INPUT-
9. (CH.6) INPUT+

DATA RS232 IN/OUT(PORT 4) (DB-9 FEMALE)

1. (CH.4) NA
2. (CH.1) OUTPUT (TD)
3. (CH.1) INPUT (RD)
4. (CH.2) NA
5. GND
6. (CH.2) NA
7. (CH.3) NA
8. (CH.3) NA
9. (CH.4) NA

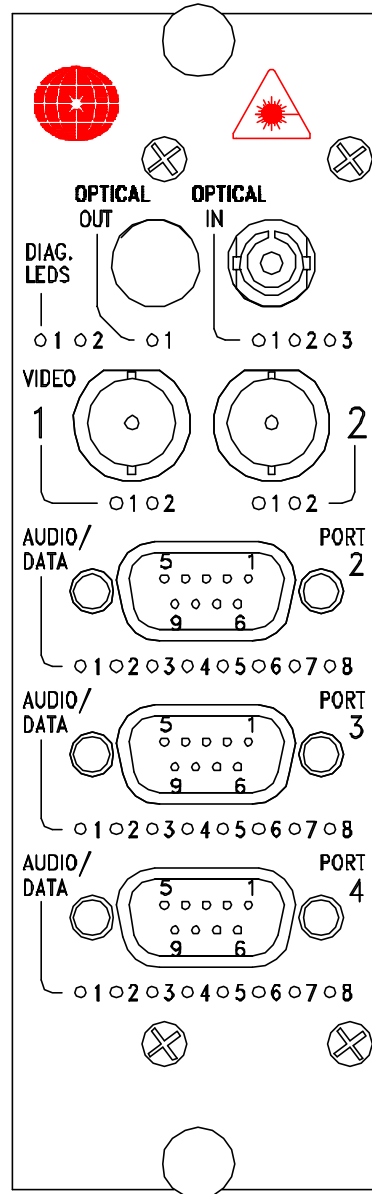

OPTICAL PORT STATUS INDICATORS

1. NA
2. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
3. RX CARRIER (GREEN)/ERROR (RED)

VIDEO INPUT (CH.2)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

STATUS INDICATORS (PORT 2)

1. (CH.1) AUDIO INPUT PRESENT
2. (CH.1) AUDIO INPUT OVERLOAD
3. (CH.2) AUDIO INPUT PRESENT
4. (CH.2) AUDIO INPUT OVERLOAD
5. (CH.1) AUDIO OUTPUT PRESENT
6. (CH.1) AUDIO OUTPUT OVERLOAD
7. (CH.2) AUDIO OUTPUT PRESENT
8. (CH.2) AUDIO OUTPUT OVERLOAD

STATUS INDICATORS (PORT 3)

1. (CH.5) AUDIO INPUT PRESENT
2. (CH.5) AUDIO INPUT OVERLOAD
3. (CH.6) AUDIO INPUT PRESENT
4. (CH.6) AUDIO INPUT OVERLOAD
5. (CH.7) AUDIO INPUT PRESENT
6. (CH.7) AUDIO INPUT OVERLOAD
7. (CH.8) AUDIO INPUT PRESENT
8. (CH.8) AUDIO INPUT OVERLOAD

STATUS INDICATORS (PORT 4)

1. (CH.1) DATA INPUT
2. (CH.1) DATA OUTPUT
3. (CH.2) NA
4. (CH.2) NA
5. (CH.3) NA
6. (CH.3) NA
7. (CH.4) NA
8. (CH.4) NA

DR-2V(W)6A1D/2A1D-X

PINOUT DIAGRAM

STATUS INDICATORS

1. POWER (GREEN)
2. NA

STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)

VIDEO OUTPUT (CH.1)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

AUDIO INPUT/OUTPUT (PORT 2)

(DB-9 FEMALE)

1. (CH.1) OUTPUT-
2. (CH.1) OUTPUT+
3. (CH.2) OUTPUT-
4. (CH.2) OUTPUT+
5. GND
6. (CH.1) INPUT-
7. (CH.1) INPUT+
8. (CH.2) INPUT-
9. (CH.2) INPUT+

AUDIO OUTPUT (PORT 3)


(DB-9 FEMALE)

1. (CH.3) OUTPUT-
2. (CH.3) OUTPUT+
3. (CH.4) OUTPUT-
4. (CH.4) OUTPUT+
5. GND
6. (CH.5) OUTPUT-
7. (CH.5) OUTPUT+
8. (CH.6) OUTPUT-
9. (CH.6) OUTPUT+

DATA RS232 IN/OUT(PORT 4)

(DB-9 FEMALE)

1. (CH.4) NA
2. (CH.1) OUTPUT (TD)
3. (CH.1) INPUT (RD)
4. (CH.2) NA
5. GND
6. (CH.2) NA
7. (CH.3) NA
8. (CH.3) NA
9. (CH.4) NA

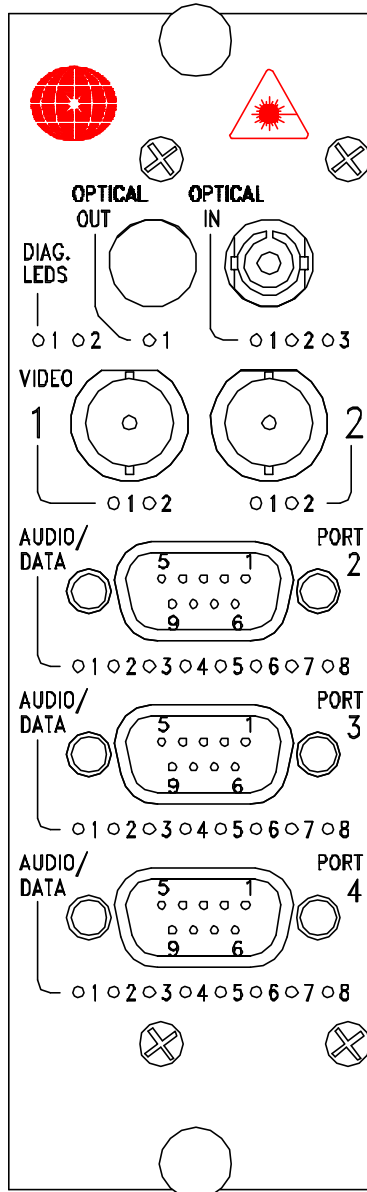

OPTICAL PORT STATUS INDICATORS

1. NA
2. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
3. RX CARRIER (GREEN)/ERROR (RED)

VIDEO OUTPUT (CH.2)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

STATUS INDICATORS (PORT 2)

1. (CH.1) AUDIO INPUT PRESENT
2. (CH.1) AUDIO INPUT OVERLOAD
3. (CH.2) AUDIO INPUT PRESENT
4. (CH.2) AUDIO INPUT OVERLOAD
5. (CH.1) AUDIO OUTPUT PRESENT
6. (CH.1) AUDIO OUTPUT OVERLOAD
7. (CH.2) AUDIO OUTPUT PRESENT
8. (CH.2) AUDIO OUTPUT OVERLOAD

STATUS INDICATORS (PORT 3)

1. (CH.5) AUDIO OUTPUT PRESENT
2. (CH.5) AUDIO OUTPUT OVERLOAD
3. (CH.6) AUDIO OUTPUT PRESENT
4. (CH.6) AUDIO OUTPUT OVERLOAD
5. (CH.7) AUDIO OUTPUT PRESENT
6. (CH.7) AUDIO OUTPUT OVERLOAD
7. (CH.8) AUDIO OUTPUT PRESENT
8. (CH.8) AUDIO OUTPUT OVERLOAD

STATUS INDICATORS (PORT 4)

1. (CH.1) DATA INPUT
2. (CH.1) DATA OUTPUT
3. (CH.2) NA
4. (CH.2) NA
5. (CH.3) NA
6. (CH.3) NA
7. (CH.4) NA
8. (CH.4) NA