

# DT-4D-X

## PINOUT DIAGRAM


### OPTICAL PORT

#### STATUS INDICATORS

1. POWER (GREEN)
2. NA

#### STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)

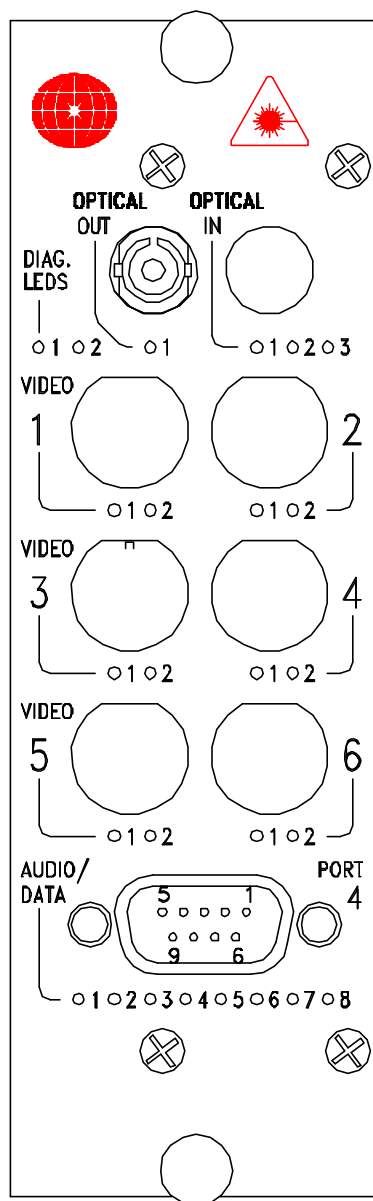

### DATA RS232 IN (PORT 4) (DB-9 FEMALE)

1. (CH.4) INPUT (CD)
2. NA
3. (CH.1) INPUT (RD)
4. (CH.2) INPUT (DTR)
5. GND
6. NA
7. (CH.3) INPUT (RTS)
8. NA
9. NA

### STATUS INDICATORS (PORT 4)


1. (CH.1) DATA INPUT
2. NA
3. (CH.2) DATA INPUT
4. NA
5. (CH.3) DATA INPUT
6. NA
7. (CH.4) DATA INPUT
8. NA

# DR-4D-X

## PINOUT DIAGRAM

### STATUS INDICATORS

1. POWER (GREEN)
2. NA

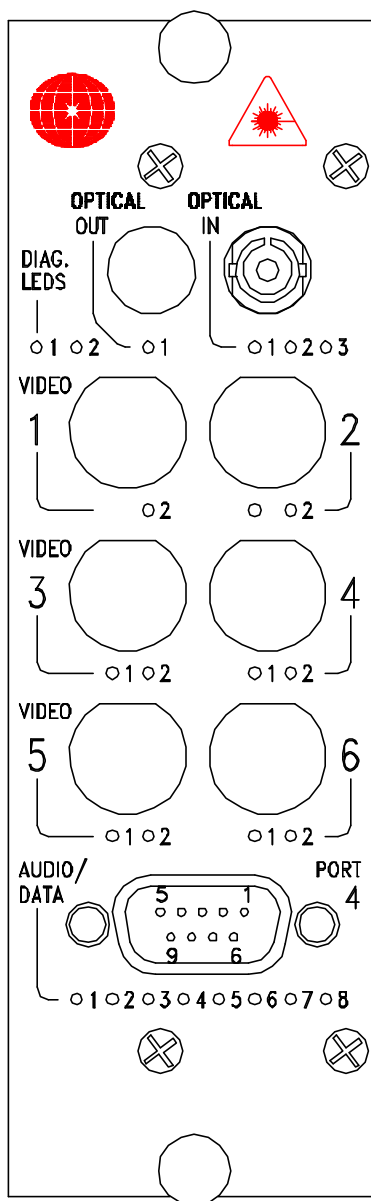

### DATA RS232 OUT (PORT 4) (DB-9 FEMALE)

1. NA
2. (CH.1) OUTPUT (TD)
3. NA
4. NA
5. GND
6. (CH.2) OUTPUT (DSR)
7. NA
8. (CH.3) OUTPUT (CTS)
9. (CH.4) OUTPUT (RI)

### OPTICAL PORT STATUS INDICATORS

1. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
2. NA
3. RX CARRIER (GREEN)/ERROR (RED)

### STATUS INDICATORS (PORT 4)

1. NA
2. (CH.1) DATA OUTPUT
3. NA
4. (CH.2) DATA OUTPUT
5. NA
6. (CH.3) DATA OUTPUT
7. NA
8. (CH.4) DATA OUTPUT