

DT-4F-X


PINOUT DIAGRAM

OPTICAL PORT STATUS INDICATORS

1. POWER (GREEN)
2. NA

STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)

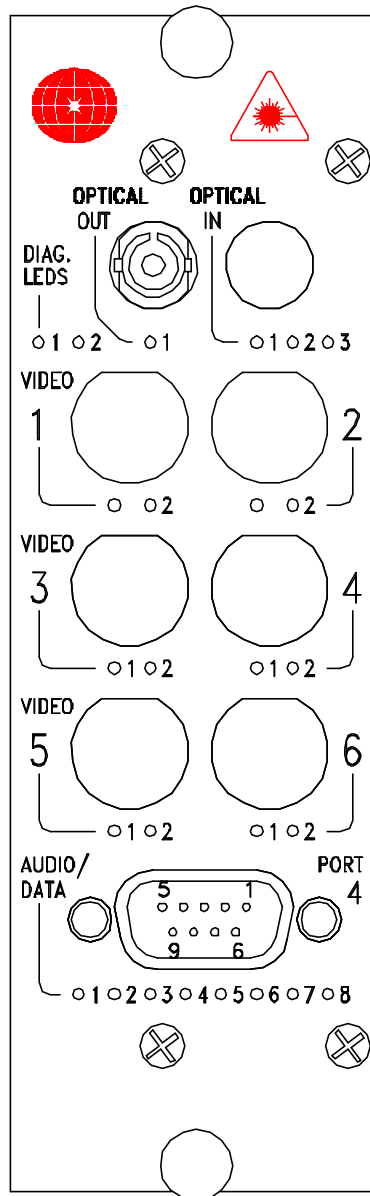

DATA RS422 IN (PORT 4) (DB-9 FEMALE)

1. (CH.1) INPUT +
2. (CH.1) INPUT -
3. (CH.2) INPUT +
4. (CH.2) INPUT -
5. GND
6. (CH.3) INPUT +
7. (CH.3) INPUT -
8. (CH.4) INPUT +
9. (CH.4) INPUT -

STATUS INDICATORS (PORT 4)


1. (CH.1) DATA INPUT
2. NA
3. (CH.2) DATA INPUT
4. NA
5. (CH.3) DATA INPUT
6. NA
7. (CH.4) DATA INPUT
8. NA

DR-4F-X

PINOUT DIAGRAM

STATUS INDICATORS

1. POWER (GREEN)
2. NA

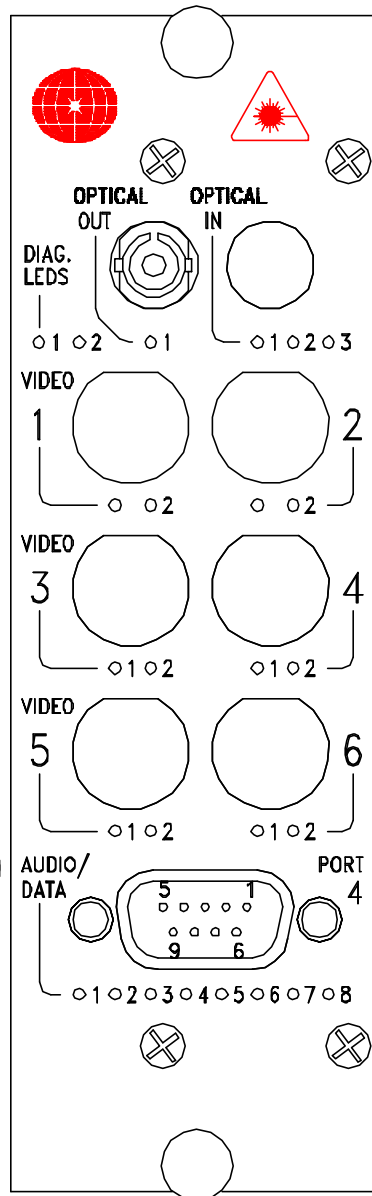

OPTICAL PORT STATUS INDICATORS

1. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
2. NA
3. RX CARRIER (GREEN)/ERROR (RED)

DATA RS422 OUT (PORT 4) (DB-9 FEMALE)

1. (CH.1) OUTPUT +
2. (CH.1) OUTPUT -
3. (CH.2) OUTPUT +
4. (CH.2) OUTPUT -
5. GND
6. (CH.3) OUTPUT +
7. (CH.3) OUTPUT -
8. (CH.4) OUTPUT +
9. (CH.4) OUTPUT -

STATUS INDICATORS (PORT 4)

1. NA
2. (CH.1) DATA OUTPUT
3. NA
4. (CH.2) DATA OUTPUT
5. NA
6. (CH.3) DATA OUTPUT
7. NA
8. (CH.4) DATA OUTPUT