

DT-4V(W)/2F-X

PINOUT DIAGRAM

STATUS INDICATORS

1. POWER (GREEN)
2. NA

STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)

VIDEO INPUT (CH.1)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)


VIDEO INPUT (CH.3)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

DATA RS422 OUT (PORT 4) (DB-9 FEMALE)

1. (CH.1) OUTPUT +
2. (CH.1) OUTPUT -
3. (CH.2) OUTPUT +
4. (CH.2) OUTPUT -
5. GND
6. NA
7. NA
8. NA
9. NA

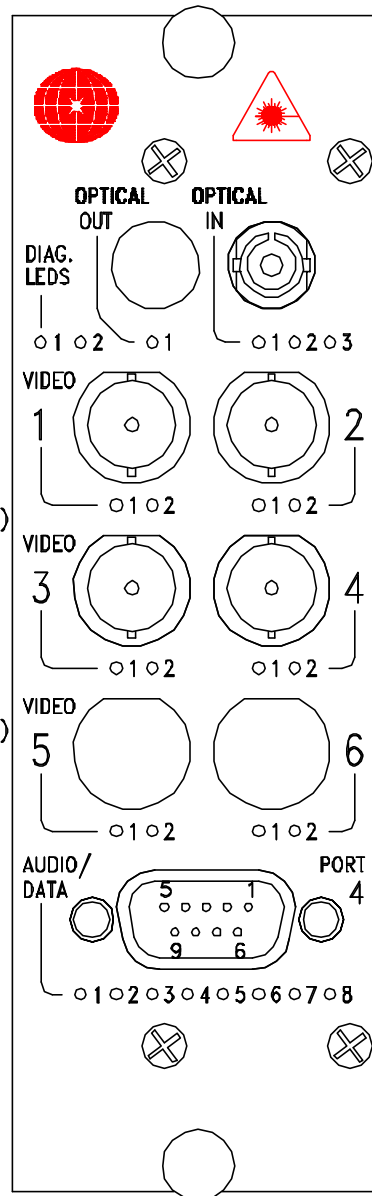

OPTICAL PORT

STATUS INDICATORS

1. NA
2. RX OPTICAL SIGNAL (GREEN)/ ABSENT (RED)
3. RX CARRIER (GREEN)/ERROR (RED)

VIDEO INPUT (CH.2)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

VIDEO INPUT (CH.4)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)


STATUS INDICATORS (PORT 4)

1. NA
2. (CH.1) DATA OUTPUT
3. NA
4. (CH.2) DATA OUTPUT
5. NA
6. NA
7. NA
8. NA

DR-4V(W)/2F-X

PINOUT DIAGRAM

- STATUS INDICATORS**
1. POWER (GREEN)
 2. NA
- STATUS INDICATORS**
1. TX CARRIER (GREEN)/ERROR (RED)
- VIDEO OUTPUT (CH.1)**
- STATUS INDICATORS**
1. SYNC PRESENT (GREEN)
 2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)
- VIDEO OUTPUT (CH.3)**
- STATUS INDICATORS**
1. SYNC PRESENT (GREEN)
 2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)
- DATA RS422 IN (PORT 4)**
(DB-9 FEMALE)
1. (CH.1) INPUT +
 2. (CH.1) INPUT -
 3. (CH.2) INPUT +
 4. (CH.2) INPUT -
 5. GND
 6. NA
 7. NA
 8. NA
 9. NA

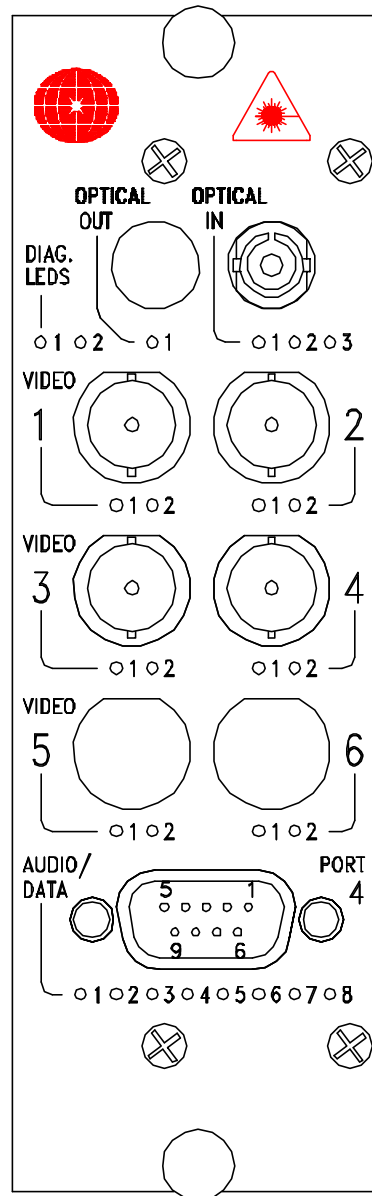

- OPTICAL PORT**
- STATUS INDICATORS**
1. NA
 2. RX OPTICAL SIGNAL (GREEN)/ ABSENT (RED)
 3. RX CARRIER (GREEN)/ERROR (RED)
- VIDEO OUTPUT (CH.2)**
- STATUS INDICATORS**
1. SYNC PRESENT (GREEN)
 2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)
- VIDEO OUTPUT (CH.4)**
- STATUS INDICATORS**
1. SYNC PRESENT (GREEN)
 2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)
- STATUS INDICATORS (PORT 4)**
1. (CH.1) DATA INPUT
 2. NA
 3. (CH.2) DATA INPUT
 4. NA
 5. NA
 6. NA
 7. NA
 8. NA