

# DT-6F-X

## PINOUT DIAGRAM


- OPTICAL PORT**
- STATUS INDICATORS**
1. POWER (GREEN)
  2. NA
- STATUS INDICATORS**
1. TX CARRIER (GREEN)/ERROR (RED)

**DATA RS422 (PORT 3)**  
(DB-9 FEMALE)

1. (CH.1) INPUT +
2. (CH.1) INPUT -
3. (CH.2) INPUT +
4. (CH.2) INPUT -
5. GND
6. (CH.3) INPUT +
7. (CH.3) INPUT -
8. (CH.4) INPUT +
9. (CH.4) INPUT -

**DATA RS422 (PORT 4)**  
(DB-9 FEMALE)

1. (CH.5) INPUT +
2. (CH.5) INPUT -
3. (CH.6) INPUT +
4. (CH.6) INPUT -
5. GND
6. NA
7. NA
8. NA
9. NA

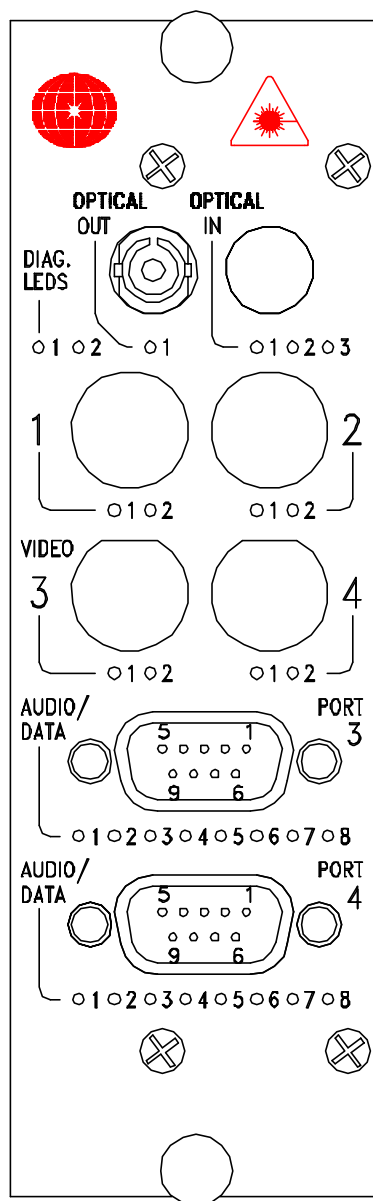

- STATUS INDICATORS**
1. NA
  2. NA
  3. NA

**STATUS INDICATORS (PORT 3)**

1. (CH.1) DATA INPUT
2. NA
3. (CH.2) DATA INPUT
4. NA
5. (CH.3) DATA INPUT
6. NA
7. (CH.4) DATA INPUT
8. NA

**STATUS INDICATORS (PORT 4)**

1. (CH.5) DATA INPUT
2. NA
3. (CH.6) DATA INPUT
4. NA
5. NA
6. NA
7. NA
8. NA

# DR-6F-X

## PINOUT DIAGRAM

### STATUS INDICATORS

1. POWER (GREEN)
2. NA

### STATUS INDICATORS


1. NA

### DATA RS422 (PORT 3) (DB-9 FEMALE)

1. (CH.3) OUTPUT +
2. (CH.3) OUTPUT -
3. (CH.4) OUTPUT +
4. (CH.4) OUTPUT -
5. GND
6. (CH.3) OUTPUT +
7. (CH.3) OUTPUT -
8. (CH.4) OUTPUT +
9. (CH.4) OUTPUT -

### DATA RS422 (PORT 4) (DB-9 FEMALE)

1. (CH.5) OUTPUT +
2. (CH.5) OUTPUT -
3. (CH.6) OUTPUT +
4. (CH.6) OUTPUT -
5. GND
6. NA
7. NA
8. NA
9. NA

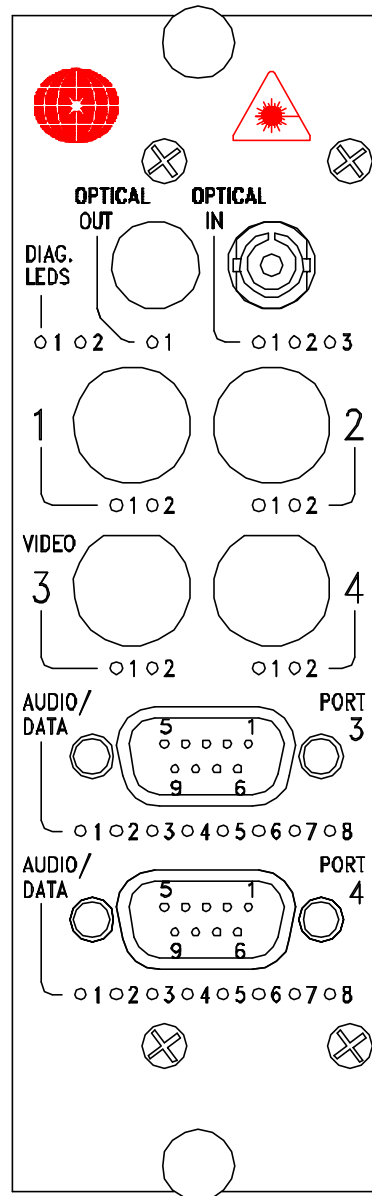

### OPTICAL PORT

### STATUS INDICATORS

1. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
2. NA
3. RX CARRIER (GREEN)/ERROR (RED)

### STATUS INDICATORS (PORT 3)

1. NA
2. (CH.1) DATA OUTPUT
3. NA
4. (CH.2) DATA OUTPUT
5. NA
6. (CH.3) DATA OUTPUT
7. NA
8. (CH.4) DATA OUTPUT

### STATUS INDICATORS PORT 4)

1. NA
2. (CH.5) DATA OUTPUT
3. NA
4. (CH.6) DATA OUTPUT
5. NA
6. NA
7. NA
8. NA