

DT-2A2F-X

PINOUT DIAGRAM

OPTICAL PORT

STATUS INDICATORS

1. POWER (GREEN)
2. NA

STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)

AUDIO INPUT (PORT 3)


(DB-9 FEMALE)

1. (CH.1) INPUT-
2. (CH.1) INPUT+
3. (CH.2) INPUT-
4. (CH.2) INPUT+
5. GND
6. (CH.3) NA
7. (CH.3) NA
8. (CH.4) NA
9. (CH.4) NA

DATA RS422 INPUT (PORT 4)

(DB-9 FEMALE)

1. (CH.1) INPUT +
2. (CH.1) INPUT -
3. (CH.2) INPUT +
4. (CH.2) INPUT -
5. GND
6. NA
7. NA
8. NA
9. NA

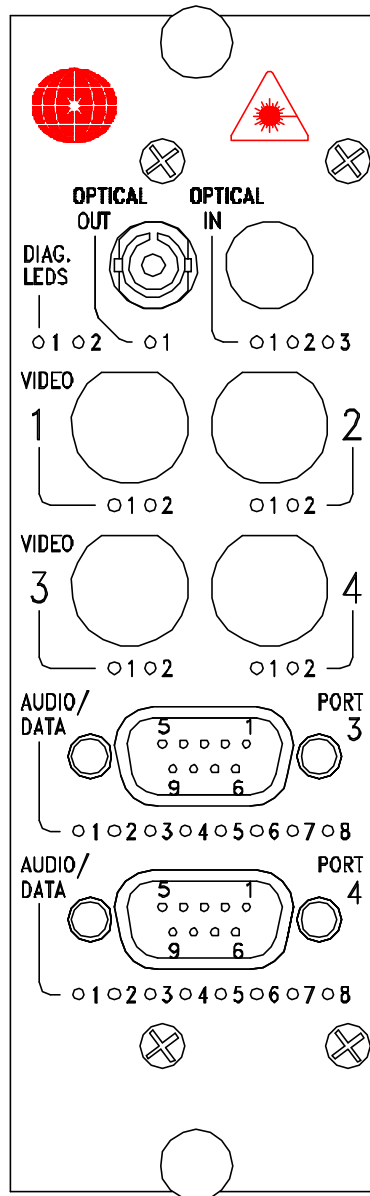

STATUS INDICATORS (PORT 3)

1. (CH.1) AUDIO INPUT PRESENT
2. (CH.1) AUDIO INPUT OVERLOAD
3. (CH.2) AUDIO INPUT PRESENT
4. (CH.2) AUDIO INPUT OVERLOAD
5. (CH.3) NA
6. (CH.3) NA
7. (CH.4) NA
8. (CH.4) NA

STATUS INDICATORS (PORT 4)

1. (CH.1) DATA INPUT
2. NA
3. (CH.2) DATA INPUT
4. NA
5. NA
6. NA
7. NA
8. NA

DR-2A2F-X

PINOUT DIAGRAM

STATUS INDICATORS

1. POWER (GREEN)
2. NA

STATUS INDICATORS

1. NA

AUDIO OUTPUT (PORT 3)


(DB-9 FEMALE)

1. (CH.1) OUTPUT-
2. (CH.1) OUTPUT+
3. (CH.2) OUTPUT-
4. (CH.2) OUTPUT+
5. GND
6. (CH.3) NA
7. (CH.3) NA
8. (CH.4) NA
9. (CH.4) NA

DATA RS422 OUTPUT (PORT 4)

(DB-9 FEMALE)

1. (CH.1) OUTPUT +
2. (CH.1) OUTPUT -
3. (CH.2) OUTPUT +
4. (CH.2) OUTPUT -
5. GND
6. NA
7. NA
8. NA
9. NA

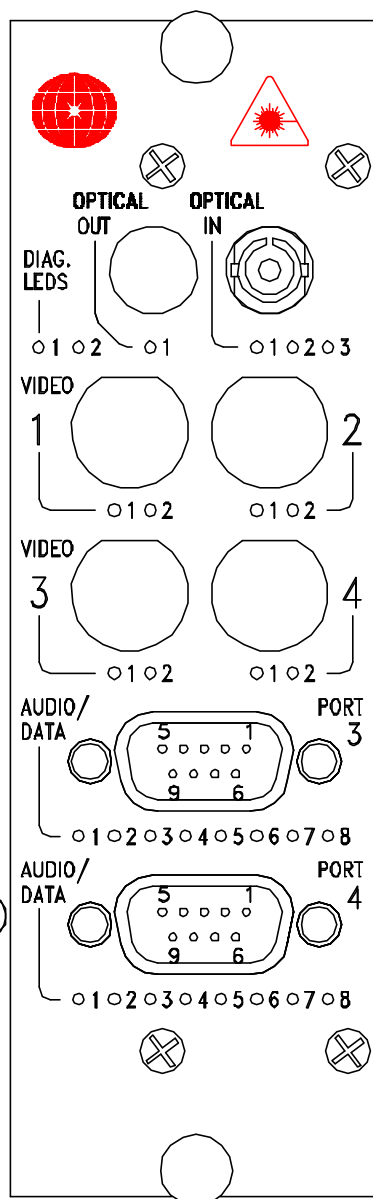

OPTICAL PORT

STATUS INDICATORS

1. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
2. NA
3. RX CARRIER (GREEN)/ERROR (RED)

STATUS INDICATORS (PORT 3)

1. (CH.1) AUDIO OUTPUT PRESENT
2. (CH.1) AUDIO OUTPUT OVERLOAD
3. (CH.2) AUDIO OUTPUT PRESENT
4. (CH.2) AUDIO UOUTPUT OVERLOAD
5. (CH.3) NA
6. (CH.3) NA
7. (CH.4) NA
8. (CH.4) NA

STATUS INDICATORS (PORT 4)

1. NA
2. (CH.1) DATA OUTPUT
3. NA
4. (CH.2) DATA OUTPUT
5. NA
6. NA
7. NA
8. NA