


MXA/MXB-1R/1R-X

PINOUT DIAGRAM

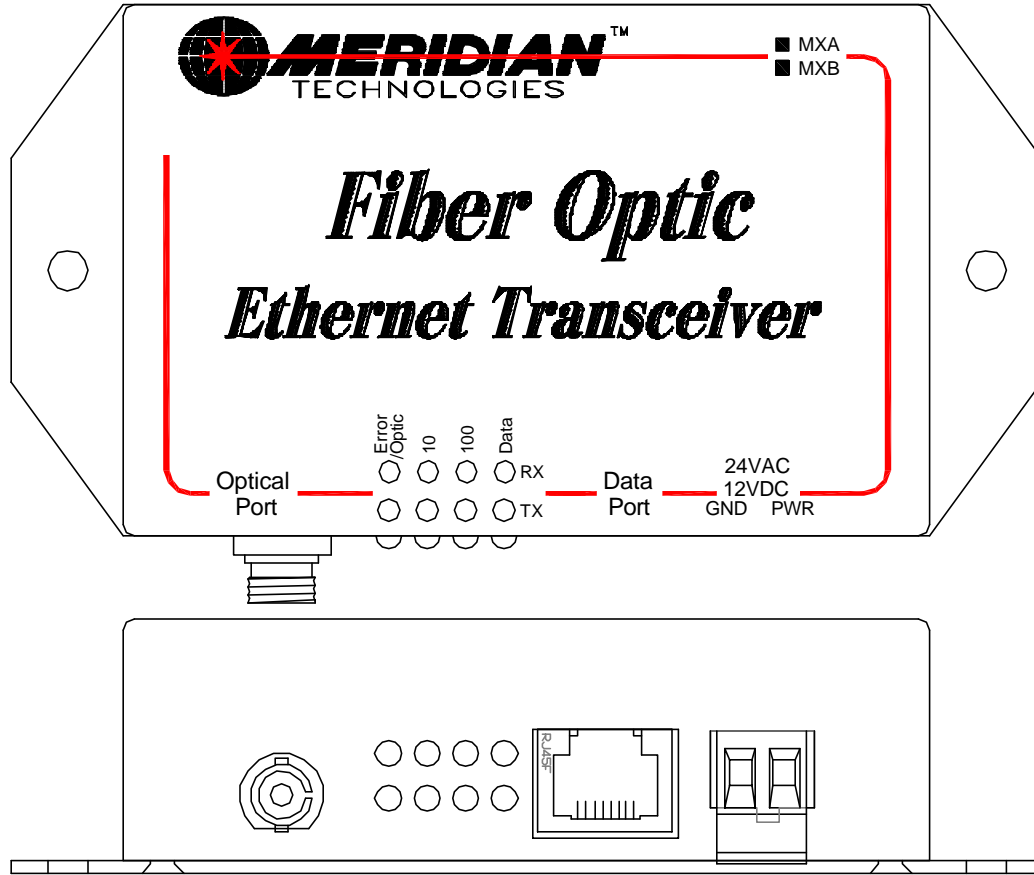

OPTICAL PORT IN/OUT (ST, FC)

STATUS INDICATORS

- TX ERROR - NORMAL OFF/LASER DRIVER ERROR (GREEN)
- RX OPTIC - NORMAL OFF/OPTICAL SIGNAL ABSENT (GREEN)
- TX 10 - 10 BASE-T DATA INPUT (GREEN)
- RX 10 - 10 BASE-T DATA OUTPUT (GREEN)
- TX 100 - 100 BASE-T DATA INPUT (GREEN)
- RX 100 - 100 BASE-T DATA OUTPUT (GREEN)
- TX DATA - DATA ACTIVITY INPUT (GREEN)
- RX DATA - DATA ACTIVITY OUTPUT (GREEN)

10/100 ETHERNET INPUT/OUTPUT
(RJ-45 FEMALE)

POWER
24 VAC