


ST-7C-X

PINOUT DIAGRAM

STATUS INDICATORS

- PWR - POWER (GREEN)
- DIAG - NA
- TX C/L - TX CARRIER (GREEN)
/OVERLOAD (RED)
- RX C/E - NA
- SYN - NA
- VID - NA

- DR1 - (CH.1) CC INPUT
- DR2 - (CH.2) CC INPUT
- AR1 - (CH.3) CC INPUT
- AR2 - (CH.4) CC INPUT
- CR1 - (CH.5) CC INPUT
- CR2 - (CH.6) CC INPUT
- DT1 - (CH.7) CC INPUT
- DT2 - NA
- AT1 - NA
- AT2 - NA
- CT1 - NA
- CT2 - NA

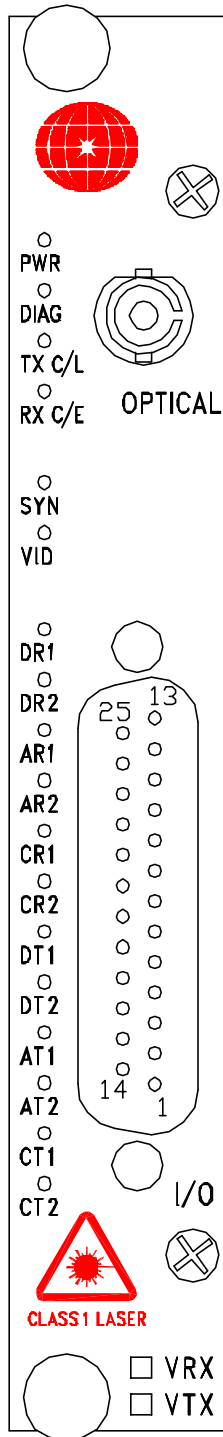

OPTICAL PORT (ST, FC)

DATA INPUT
(DB-25 FEMALE)

- 12. (CH.1) CC INPUT
- 25. (CH.1) CC GND
- 11. (CH.2) CC INPUT
- 24. (CH.2) CC GND
- 10. (CH.3) CC INPUT
- 23. (CH.3) CC GND
- 9. (CH.4) CC INPUT
- 22. (CH.4) CC GND
- 8. (CH.5) CC INPUT
- 21. (CH.5) CC GND
- 7. (CH.6) CC INPUT
- 20. (CH.6) CC GND
- 6. (CH.7) CC INPUT
- 19. (CH.7) CC GND


SR-7C-X

PINOUT DIAGRAM

STATUS INDICATORS

- PWR - POWER (GREEN)
- DIAG - NA
- TX C/L - NA
- RX C/E - RX CARRIER (GREEN)
/ERROR (RED)
- SYN - NA
- VID - NA

- DR1 - (CH.1) CC OUTPUT
- DR2 - (CH.2) CC OUTPUT
- AR1 - (CH.3) CC OUTPUT
- AR2 - (CH.4) CC OUTPUT
- CR1 - (CH.5) CC OUTPUT
- CR2 - (CH.6) CC OUTPUT
- DT1 - (CH.7) CC OUTPUT
- DT2 - NA
- AT1 - NA
- AT2 - NA
- CT1 - NA
- CT2 - NA

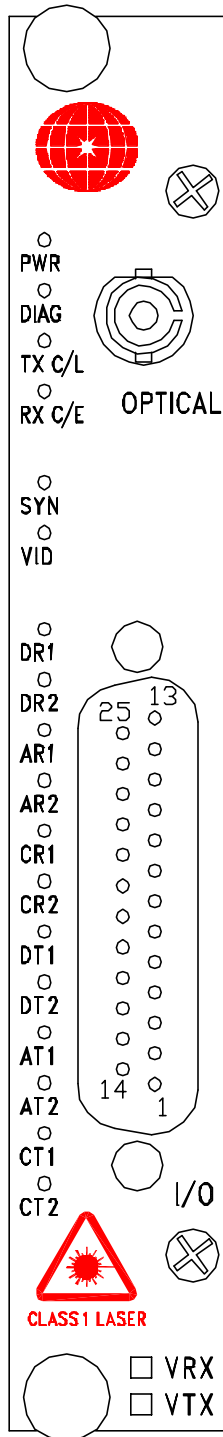

OPTICAL PORT (ST, FC)

DATA OUTPUT
(DB-25 FEMALE)

- 12. (CH.1) CC OUTPUT
- 25. (CH.1) CC OUTPUT
- 11. (CH.2) CC OUTPUT
- 24. (CH.2) CC OUTPUT
- 10. (CH.3) CC OUTPUT
- 23. (CH.3) CC OUTPUT
- 9. (CH.4) CC OUTPUT
- 22. (CH.4) CC OUTPUT
- 8. (CH.5) CC OUTPUT
- 21. (CH.5) CC OUTPUT
- 7. (CH.6) CC OUTPUT
- 20. (CH.6) CC OUTPUT
- 6. (CH.7) CC OUTPUT
- 19. (CH.7) CC OUTPUT