



ST-AiphoneAX1-XS

PINOUT DIAGRAM

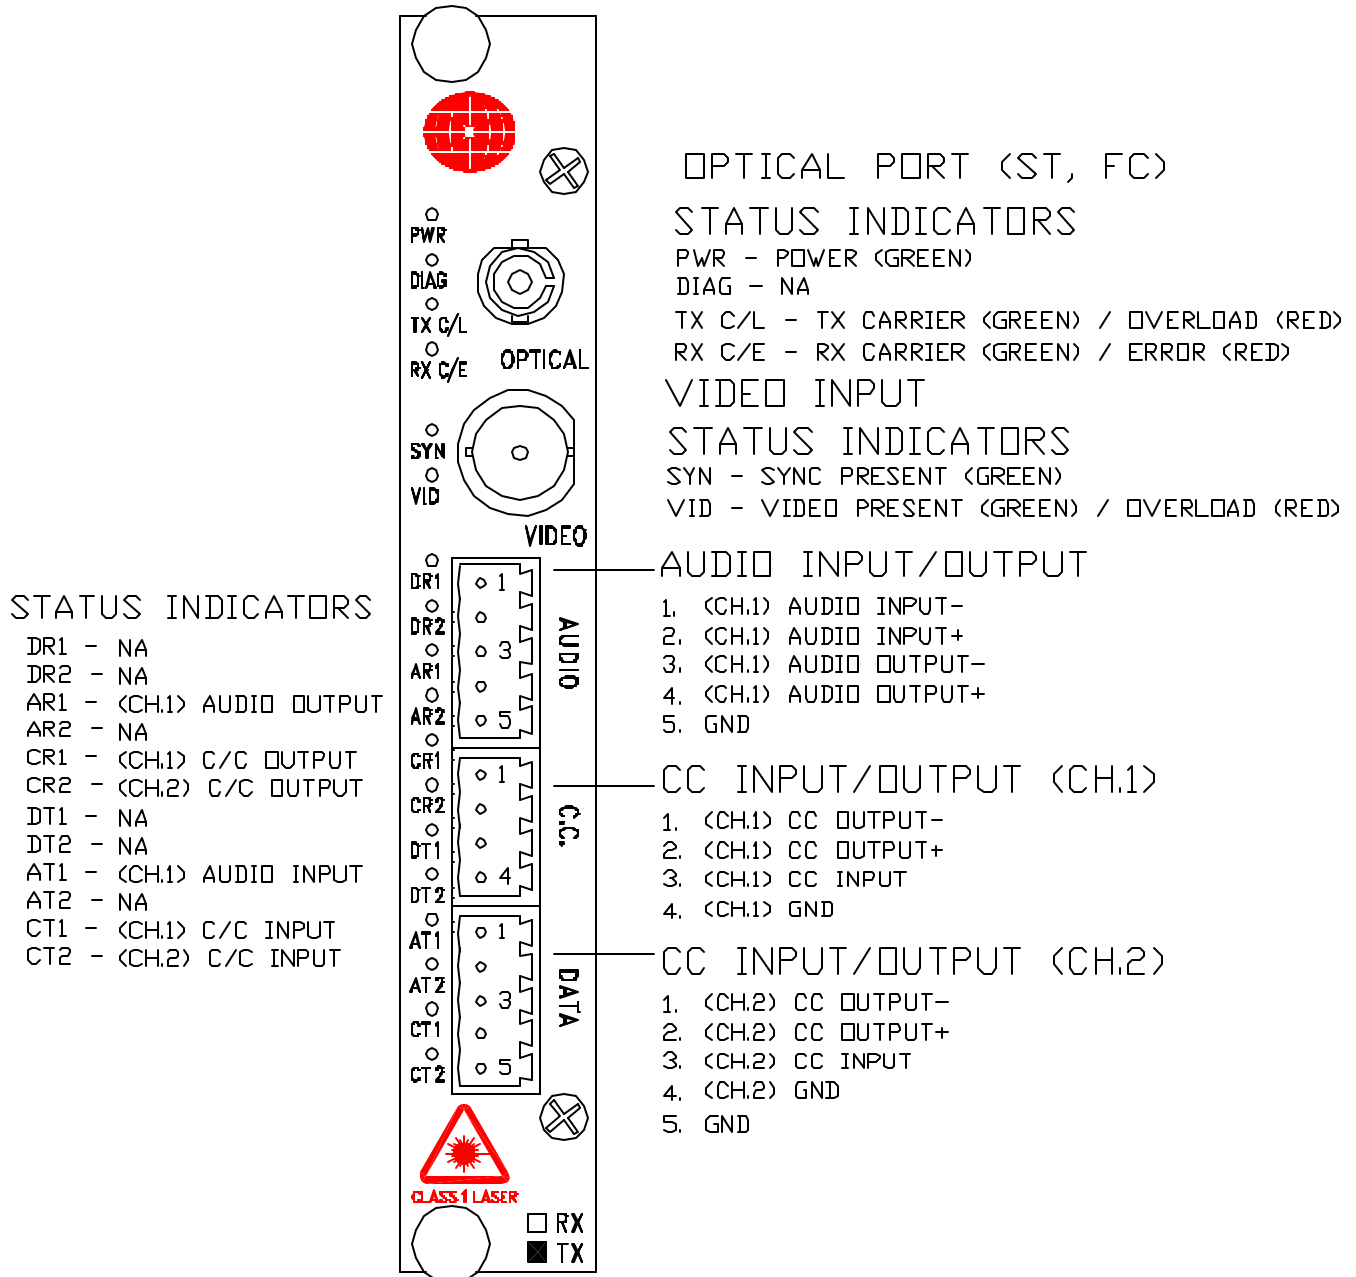

SR-AiphoneAX1-XS

PINOUT DIAGRAM

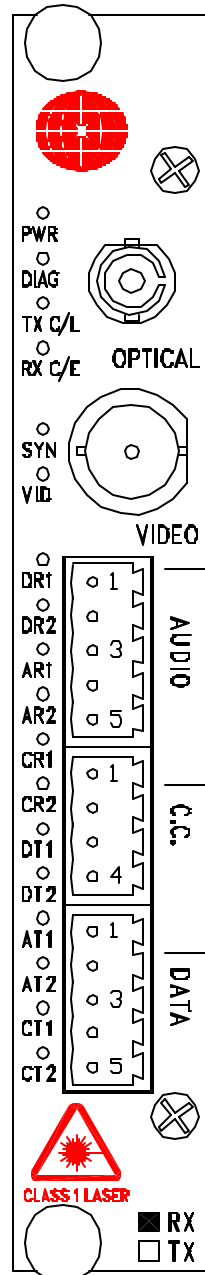

OPTICAL PORT (ST, FC)

STATUS INDICATORS

PWR - POWER (GREEN)

DIAG - NA

TX C/L - TX CARRIER (GREEN) / OVERLOAD (RED)

RX C/E - RX CARRIER (GREEN) / ERROR (RED)

VIDEO OUTPUT

STATUS INDICATORS

SYN - SYNC PRESENT (GREEN)

VID - VIDEO PRESENT (GREEN) / OVERLOAD (RED)

STATUS INDICATORS

DR1 - NA

DR2 - NA

AR1 - (CH.1) AUDIO OUTPUT

AR2 - NA

CR1 - (CH.1) C/C OUTPUT

CR2 - (CH.2) C/C OUTPUT

DT1 - NA

DT2 - NA

AT1 - (CH.1) AUDIO INPUT

AT2 - NA

CT1 - (CH.1) C/C INPUT

CT2 - (CH.2) C/C INPUT

AUDIO INPUT/OUTPUT

1. (CH.1) AUDIO INPUT-

2. (CH.1) AUDIO INPUT+

3. (CH.1) AUDIO OUTPUT-

4. (CH.1) AUDIO OUTPUT+

5. GND

CC INPUT/OUTPUT (CH.1)

1. (CH.1) CC OUTPUT-

2. (CH.1) CC OUTPUT+

3. (CH.1) CC INPUT

4. (CH.1) GND

CC INPUT/OUTPUT (CH.2)

1. (CH.2) CC OUTPUT-

2. (CH.2) CC OUTPUT+

3. (CH.2) CC INPUT

4. (CH.2) GND

5. GND