

# SXA/SXB-1R/1R-X


## PINOUT DIAGRAM

### STATUS INDICATORS

PWR/DIAG - POWER (GREEN) or DIAGNOSTIC  
PRESENT FLASH (GREEN)/ERROR (RED)

### STATUS INDICATORS CH.1

T10 - 10 BASE-T DATA INPUT (GREEN)  
T100 - 100 BASE-T DATA INPUT (GREEN)  
R10 - 10 BASE-T DATA OUTPUT (GREEN)  
R100 - 100 BASE-T DATA OUTPUT (GREEN)  
TXD - DATA ACTIVITY INPUT (GREEN)  
RXD - DATA ACTIVITY OUTPUT (GREEN)

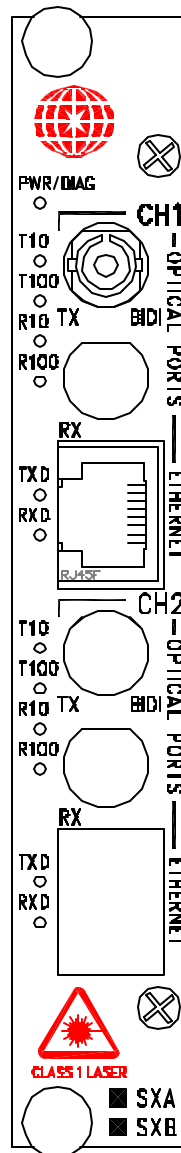

OPTICAL PORT IN/OUT CH.1  
(ST or FC)

10/100 ETHERNET INPUT/OUTPUT CH.1  
(RJ-45 FEMALE)