

SXA/SXB-2R/2R-X

PINOUT DIAGRAM

STATUS INDICATORS


PWR/DIAG - POWER (GREEN) or DIAGNOSTIC
PRESENT FLASH (GREEN)/ERROR (RED)

STATUS INDICATORS CH.1

T10 - 10 BASE-T DATA INPUT (GREEN)
T100 - 100 BASE-T DATA INPUT (GREEN)
R10 - 10 BASE-T DATA OUTPUT (GREEN)
R100 - 100 BASE-T DATA OUTPUT (GREEN)
TXD - DATA ACTIVITY INPUT (GREEN)
RXD - DATA ACTIVITY OUTPUT (GREEN)

STATUS INDICATORS CH.2

T10 - 10 BASE-T DATA INPUT (GREEN)
T100 - 100 BASE-T DATA INPUT (GREEN)
R10 - 10 BASE-T DATA OUTPUT (GREEN)
R100 - 100 BASE-T DATA OUTPUT (GREEN)
TXD - DATA ACTIVITY INPUT (GREEN)
RXD - DATA ACTIVITY OUTPUT (GREEN)

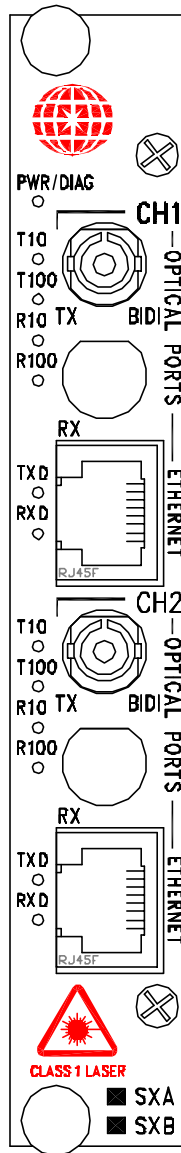

OPTICAL PORT IN/OUT CH.1
(ST or FC)

10/100 ETHERNET INPUT/OUTPUT CH.1
(RJ-45 FEMALE)

OPTICAL PORT IN/OUT CH.2
(ST or FC)

10/100 ETHERNET INPUT/OUTPUT CH.2
(RJ-45 FEMALE)