

# Operating and Installation Instructions

## Universal Frame SR-1001/S

### DESCRIPTION

The SR-1001/S is a two (2) slot wall mountable desk chassis with two (2) "edge card" connectors that accepts all Meridian Technologies' card units.


### POWER SUPPLY

The SR-1001/S is powered by an internal switching power supply. The unit accepts:

1. from 12VDC (800mA) to 30VDC (400mA)
2. from 12VAC (800mA) to 24VAC (400mA) via external power source (customer supplied).

### INSTALLATION

The unit must be installed on a vertical surface to allow maximum ventilation top to bottom of the card units. There are four mounting holes for hardware # 8 (maximum). Two knurled captive screws mount the card in each slot. Power is distributed by a mother PCB in the rear of unit.

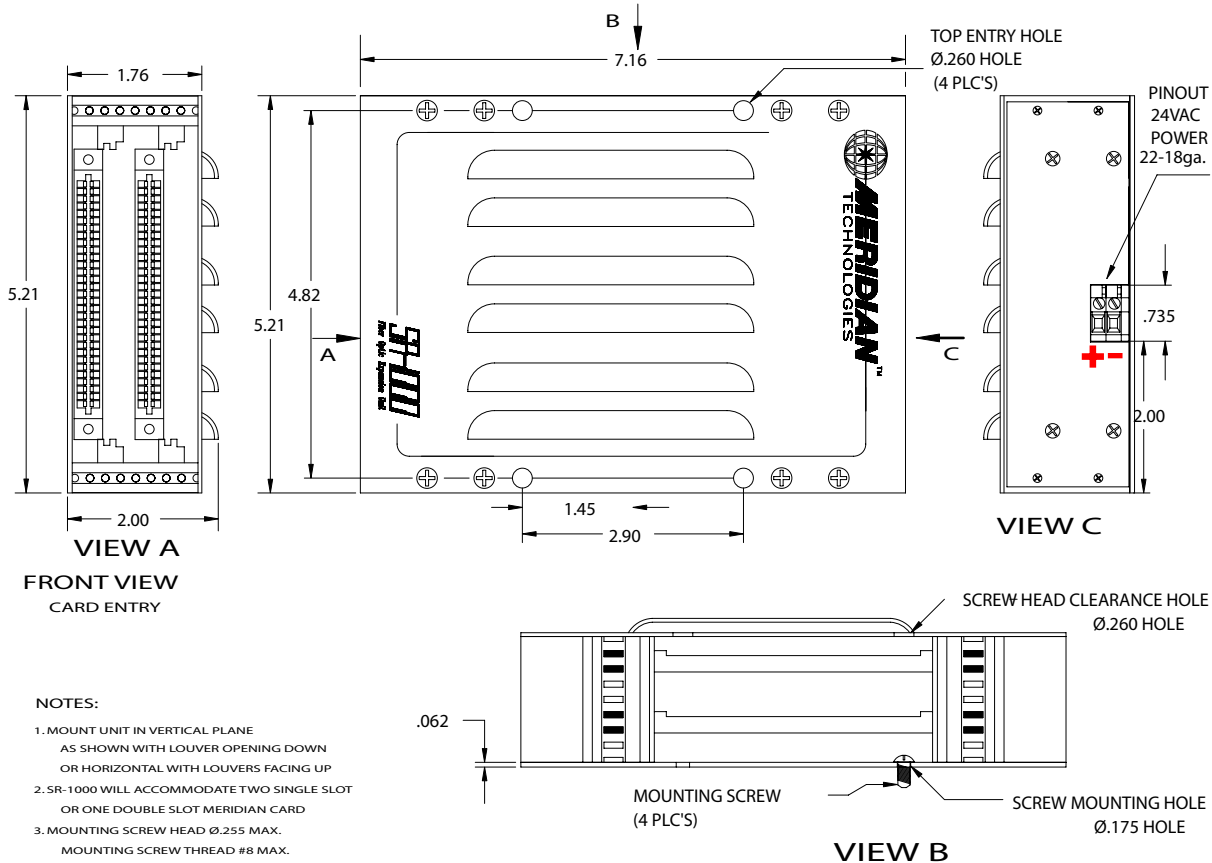

#### Power Options:

1. from 12VDC (800mA) to 30VDC (400mA)
2. from 12VAC (800mA) to 24VAC (400mA)