




Two Channel Aiphone AX Compatible Fiber-Optic Transmission System with Two Video Channels and Bi-directional Audio and Contact Closures using the Industry Standard Small Form Pluggable (SFP) Optical Device

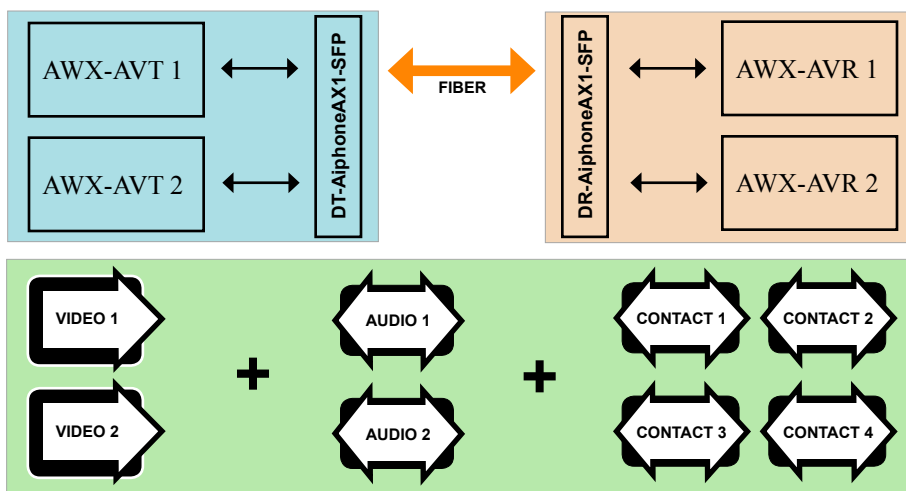

FEATURES:

- Aiphone AX system compatible
- 10 Bit Video Digital Encoding
- 2 Real-Time Video Signals with Two full duplex Audio Channels and 4 Bi-directional Contact Closure
- 7 MHz video bandwidth
- Meets RS-250C transmission specifications
- NTSC, PAL, SECAM compatible
- Wide Optical Dynamic Range: Eliminates need for optical attenuators
- Laser based systems for Multimode and Singlemode via SFP modules
- Surface Mount Technology (SMT) for high reliability and repeatability
- SpectraSmart™ Network Management compatible
- Local LED status indicators to monitor critical system diagnostics for performance parameters
- LC, SC Optical Connector (SFP dependent)
- Hot swappable cards
- 75 Ohm BNC Video Connector (gold center pin)
- Meets EIA RS-170, RS-343A formats
- DB9 Connector for Audio (DB9 to ScrewTerminal adapter optional)
- DB15 Connector for Contacts

DESCRIPTION:

This card is designed specifically to work seamlessly with the two Aiphone AX intercom systems on multimode or singlemode fiber. The card features 2 channels of 10-bit, high resolution video, 2 channels of 24-bit audio and 4 channels of bi-directional contact closures. These Contact Closure channels can be individually configured as either Normally Open (N.O.) or Normally closed (N.C.).

The DT/DR-AiphoneAX2-SFP accepts PAL, SECAM, or NTSC formats.

This product incorporates the industry standard Small Form Pluggable (SFP) optical device. This SFP gives you the option for either singlemode, multimode or CWDM wavelength selections by simply plugging in the appropriate SFP module.

The functionality of this product are further enhanced by their compatibility with Meridian's PC based SpectraSmart, Network Management and Remote Diagnostic Software System. SpectraSmart supervises the operating parameters of the transmission system such as status on video levels, sync, carrier detect, voltage, temperature, optical levels, data activity etc. See the SpectraSmart brochure for more details. Other signals can also be combined with these AiphoneAX signals to provide a more comprehensive product. Consult your Meridian sales engineer for more information on the capabilities of this card.

CONFIGURATIONS:

This product is available as a rack mount card and module that can be installed in any of Meridian's desk chassis or in 19" racking frames. This system can be configured in either star (module to rack) or trunking (rack to rack) configurations. These systems can be made a standalone system by using the SR-1002, 2 slot desk / wall mount chassis (87VAC-264VAC)

MARKETS:

- ✓ Security and surveillance
- ✓ Access Control

SPECIFICATIONS:

Video

Format	NTSC, PAL, SECAM
Voltage/Impedance	1 Vp-p, 75 Ohm, 1.5 Vp-p max.
Bandwidth	5 Hz to 6.8 MHz @ -3 dB
Differential Gain	<0.6%
Differential Phase	<0.3°
SNR	>60 dB (weighted)*
Return Loss	>30 dB
Field Tilt	< 0.5%

Contact Closure

Formats	Normally Open (N.O.) or Normally Closed (N.C.) - jumper selectable
Rate	10 Hz.(Per Channel)
Contact Rating	0.3A, 30V AC / DC
Contact Bounce Time	5 ms

Audio

I/O Impedance	600 Ohm (Bal.), 47 KOhm (Un Bal.)
Frequency Response	10 Hz to 20 KHz
SNR	>90dB (Weighted)@ 1 KHz
In/Out Level	-8 to +8 dBm (4V _{p-p} max.) (+18 dBm available on request)
Total Harmonic Distortion	<0.01% @ 1KHz
Resolution	24 Bit

Optical

Fiber Data Rate	500Mb/s
-----------------	---------

Connectors

Video	75 Ohm BNC (Gold Center Pin)
Optical	LC, SC - SFP dependent
Power (module)	See SR-500 Brochure for Details
Audio	DB9 Connector (DB9 to ScrewTerminal adapter optional)
Contact Closures	DB15 Connector

* measured @ max. optical budget

** Due to variations of drivers and diagnostic options, power shown @ max value

Power **

Card	8 Watts
------	---------

Indicators (LEDs)

1 - Green	Power On
1 - Bi-color	TX Carrier/ Laser Over Current
1 - Bi-color	RX Carrier - Present / Error
1 - Bi-color	RX optical signal - Present / Absent
2 - Bi-color	Video Present / Overload
2 - Green	Sync. Present
4 - Green	Audio Present
4 - Red	Audio Overload
4 - Green	Data Present

Physical

Dimensions (Card)	160 mm (6.3") L, 100 mm (4") W 44 mm (1.7") H
Weight (Card)	450 gms (16 Oz)
No. of Slots	2
Module	See SR-1002 spec.


Enviromental

Operating Temperature	-34°C to +74°C
Storage Temperature	-55°C to +85°C
Relative Humidity	0 to 95% Non-condensing

Quality

MTBF	>240,000 hours @ Ground Fix 35°C per MIL217F
------	---

Part Numbers:

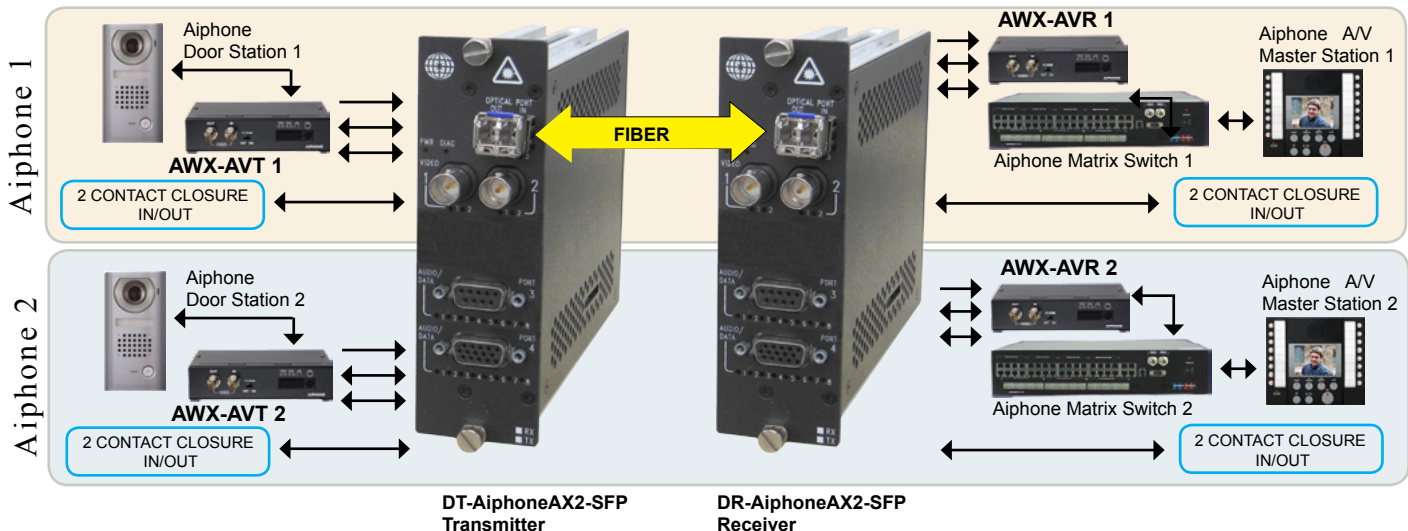

SFP OPTIONS:

The SFP series products are available for both singlemode and multimode fiber applications and ether one or two fiber versions. Recommended optical speed for this product is 1.25 Gb/s.

For more specifications on a SFP optical devices go to [SFP data sheet](#) clicking or go to:

WWW.MERIDIAN-TECH.COM -> **PRODUCTS** -> **ACCESSORIES** -> **SFP OPTICAL DEVICES**

Meridian Technologies Inc.

700 Elmont Road. • Elmont, NY 11003 • 516. 285. 1000 • FAX 516. 285. 6300 • E-mail sales@meridian-tech.com
www.meridian-tech.com

v 07/2015 B