


Digitally Encoded 1 Channel Video with Full Duplex RS-422 Data - Compatible with Pelco SPECTRA III Dome

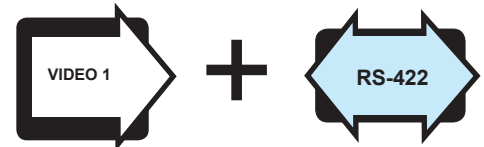

FEATURES:

- Transmitter card compatible with Pelco SPECTRA III DOME camera
- 10 Bit Video Digital Encoding
- Real Time Video and Data Transmission
- 7 MHz Video Bandwidth
- Meets RS-250C Short Haul Transmission Specifications
- NTSC, PAL, SECAM Compatible
- Supports Pelco RS-422 Data Interface
- Wide Optical Dynamic Range: Eliminates Need For Optical Attenuators
- Laser Based Systems for Multimode and Singlemode
- Surface Mount Technology (SMT) for High Reliability and Repeatability
- *SpectraSmart*™ Network Management Compatible
- Local LED Status Indicators to Monitor Critical System Diagnostics for Performance Parameters
- ST, FC Optical Connector
- Laser Back - Biased Photo Detector Circuitry for Stable Optical Output Over Full Temperature Range.
- Meets EIA RS-170, RS-343A Formats
- Status indicator lights for diagnostic testing

DESCRIPTION:

Meridian's ST-1W1PD series product is a board-level product and integrates directly in the Pelco SPECTRA III Dome camera with PTZ control. This card plugs directly into the expansion plug inside the dome providing a fiber pigtail interface directly inside the dome. This eliminates the need for an external fiber transmitter and housing.

This transmitter is part of Meridian's SC product family and incorporates an all-digital encoding technology that transmits one real-time, simplex 10-bit video channel and one full-duplex RS-422 data channel, Manchester and, Bi-Phase data protocols are also supported. NTSC, PAL and SECAM video formats are all seamlessly supported. These single fiber, laser based systems are available in both, Multimode and Singlemode modules. The SC series is also compatible with Meridian's *SpectraSmart* Network management and diagnostic PC based system. See the *SpectraSmart* brochure for additional details.

RECEIVER COMPATIBILITY:

This transmitter is compatible with the following receiver module series products:

SR-1W1F/1F-2 (multimode)
SR-1W1F/1F-5 (singlemode)

MARKETS:

- ✓ Intelligent transportation systems (ITS)
- ✓ Security and surveillance

SPECIFICATIONS:

Video

Format	NTSC, PAL, SECAM
Voltage/Impedance	1 Vp-p, 75 Ohm, 1.5 Vp-p max.
Bandwidth	5 Hz to 6.8 MHz @ -3 dB
Differential Gain	<0.6%
Differential Phase	<0.3°
SNR	>67 dB (weighted)*
Return Loss	>30 dB
Field Tilt	< 0.5%

Data

Formats	RS-422
Data Rate	DC to 125 Kb/s
Bit Error Rate	10 ⁻⁹ *

Optical

Fiber Data Rate	250 Mb/s
-----------------------	----------

Connectors

Optical	ST (Multimode) ST or FC (Singlemode)
---------------	---

Compatible Receivers

SR-1W1F/1F-2R/M	Multimode
SR-1W1F/1F-5R/M	Singlemode

Power **

Card	6 Watts
------------	---------

Indicators (LEDs) (for diagnostic testing)

1 - Bi-color	Tx Signal Lock/ Laser Over Current
1 - Bi-color	Rx Signal Lock- Present / Error
1 - Bi-color	Video Present / Overload
1 - Green	Video Sync. Present
1 - Green	Tx Data Present
1 - Green	Rx Data Present

Physical

Dimensions (Card)	160 mm (6.3") L, 127 mm (5") W 20mm (0.80") W
Weight (Card)	450 gms (16 Oz)
No. of Slots	1
Module	See SR-500 Brochure


Environmental

Operating Temperature ...	-40°C to +74°C
Storage Temperature	-55°C to +85°C
Relative Humidity	0 to 95% Non-condensing

Quality


MTBF	>200,000 hours @ Ground Fix 35°C per MIL217F
------------	---

Part Numbers:

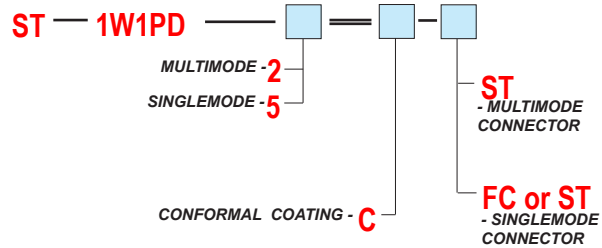

* measured @ max. optical budget

** Due to variations of drivers and diagnostic options, power shown @ max value

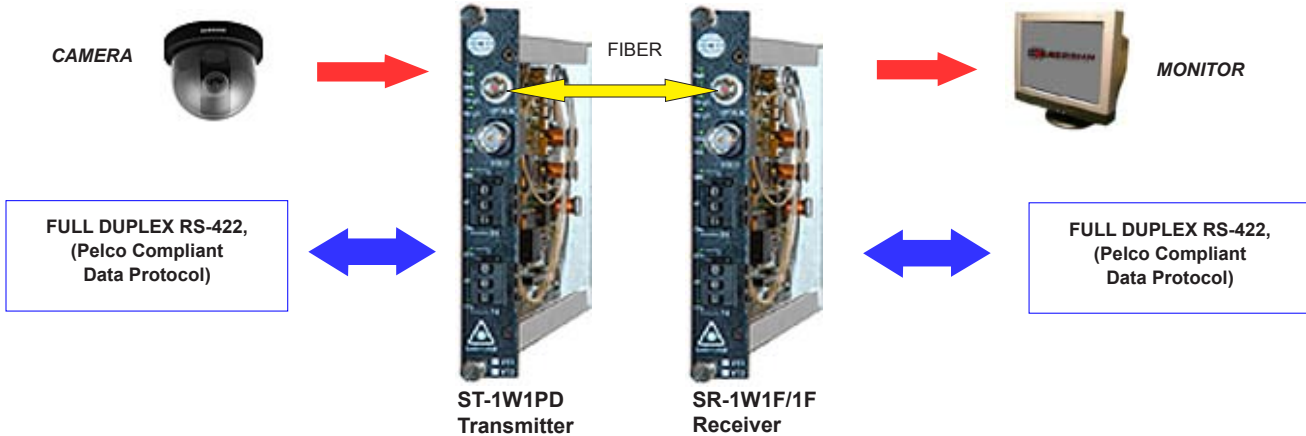

OPTICAL:

Fiber Type/Size (um)	Optical Output (dBm)	Receiver Sensitivity (dBm)	Optical Budget (dB)	Wavelength (nm)	Optical Connector	Optical Dynamic Range (dB)
Multimode (FP Laser) 62.5 / 125	-5	-26	21	1300 / 850	ST	24
Singlemode (FP Laser) 9 / 125	-5	-26	21	1310 / 1550	ST, FC	24