

**Aiphone IS Hardware-Compatible Fiber Optic
Connectivity between Aiphone IS
Master Stations and IS-CCU**



+

**FEATURES:**

- Compatible with Aiphone IS series exchange-based installations (IS-CCU)
- Single RJ45 connector interface
- Real Time Video, Audio and Control Function Transmission
- One-way Video channel
- Bi-directional Audio
- Embedded Data channel for signal flow control
- Wide operating temperature range ideal for outdoor installations
- Wide Optical Dynamic Range: Eliminates need for optical attenuators
- Controlled laser output for stable operation
- Local LED Status Indicators to monitor critical diagnostic & performance parameters
- ST, FC Optical Connector
- Hot Swappable Cards

DESCRIPTION:

The Meridian FT/FR-IS-MV-x product provides a simple, compact fiber optic transport system which seamlessly interfaces the Aiphone IS master stations with the IS-CCU or other exchange units hardware interconnect applications.

The high-quality, cost-effective transport system provides a long distance solution for campuses, parking lots, stairwells, and other remote locations.

This product series ensures an easy, user-friendly interface between the Aiphone IS Series equipment and the fiber optic infrastructure for hardware Aiphone IS applications.

A single RJ45 connection is used to interface this Meridian unit with the corresponding Aiphone equipment.

These products are available for operation over one multimode or singlemode fiber.

CONFIGURATIONS:

This product series is available as rack mount cards that can be installed in any of Meridian's desk chassis or in 19" racking frames. This system can be transformed in to a standalone module by utilizing Meridian's SR-500 chassis frame.

MARKETS:

- Security and surveillance
- Access Control

SPECIFICATIONS:

Interface and compatibility

Master station compatibility . IS-MV
Control unit compatibility ... IS-CCU & IS-SCU

Connectors

Input/output RJ45 (shielded)
Optical ST - MM(default),
FC - SM(default)

Optical

Fiber Data Rate 350 Mb/s

Power **

Card 4 Watts

Indicators (LEDs)

- 1 - Green Power On
- 1 - Bi-color TX Carrier/ Laser Over Current
- 1 - Bi-color RX Carrier - Present / Error
- 1 - Green Video Present
- 1 - Green Sync. Present
- 1 - Green Tx Audio Input
- 1 - Green Rx Audio Output
- 1 - Green Tx Data Input
- 1 - Green Rx Data Output

* measured @ max. optical budget
** Due to variations of drivers and diagnostic options, power shown @ max value

Physical

Dimensions (Card) 160 mm (6.3”) L, 127 mm (5”) W
20mm (0.80”) W
Weight (Card) 450 gms (16 Oz)
No. of Slots 1
Module See SR-500 Brochure



Enviromental

Operating Temperature ... -34°C to +74°C
Storage Temperature -55°C to +85°C
Relative Humidity 0 to 95% Non-condensing

Quality

MTBF >170,000 hours @ Ground Fix
35°C per MIL217F

Part Numbers:

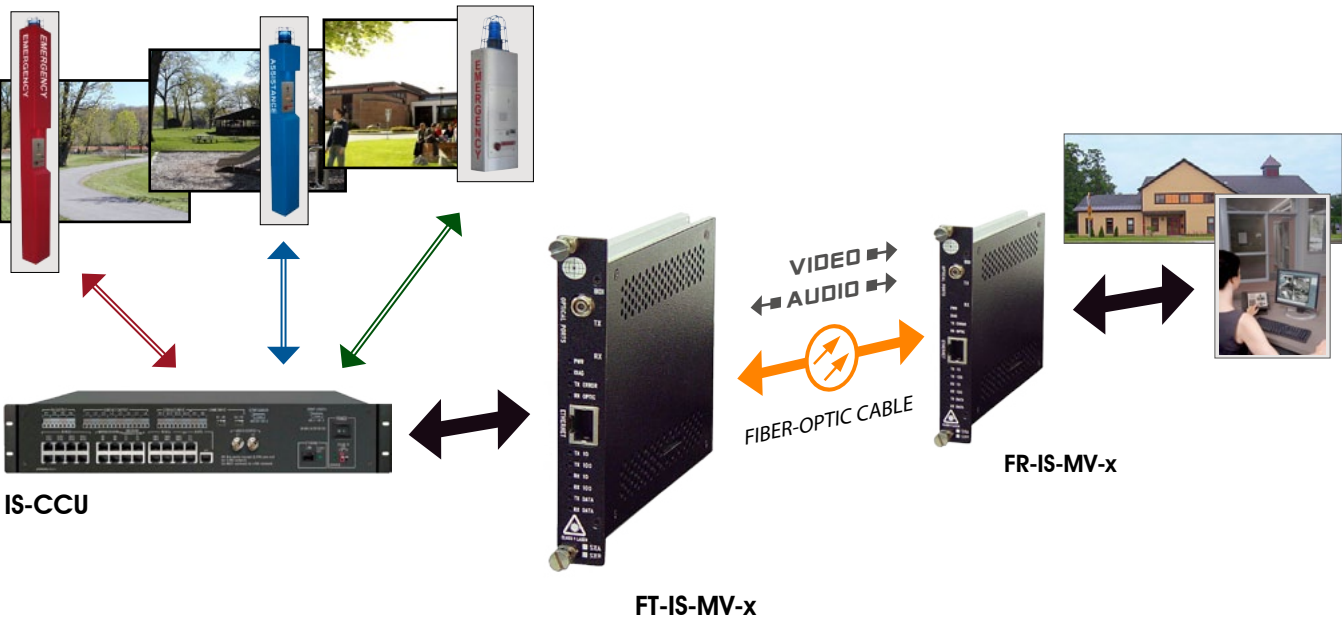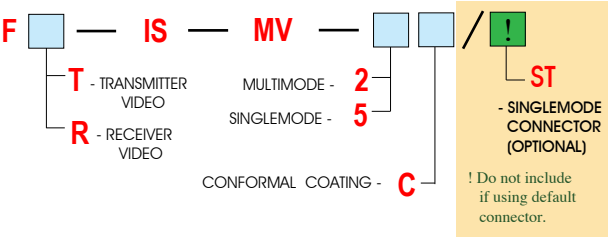

Product images provided by Aiphone®. All rights reserved. AIPHONE®

OPTICAL:

Meridian Optical Code	Fiber Type/Size (um)	Optical Output (dBm)	Receiver Sensitivity (dBm)	Optical Budget (dB)	Wavelength (nm)	Optical Connector	Optical Dynamic Range (dB)	Estimated Maximum Transmission Distance (km)
2	Multimode (FP Laser) 62.5 / 125	-5	-25	20	1300 / 850	ST	25	2
5	Singlemode (FP Laser) 9 / 125	-5	-25	20	1310 / 1550	ST, FC	25	50