


Digitally-Encoded DVI / RGB Video, USB, Keyboard & Mouse Transmission System

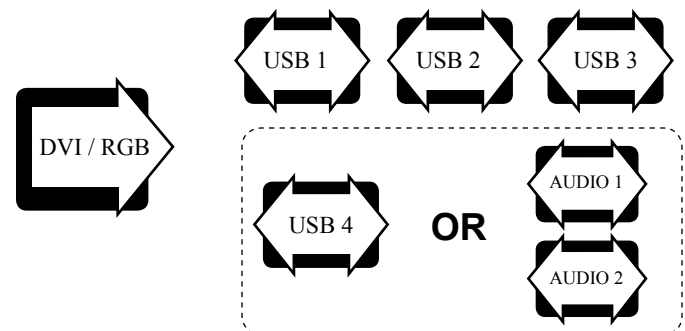

FEATURES:

- Digital Transmission of DVI, RGBHV, RGsB USB 2.0, Stereo Audio, Keyboard and Mouse over Dual Multimode Fibers
- USB 2.0 Extender with 4-port Hub or 2 Channel 16-bit Audio and 3 USB Ports
- Supports VGA, SVGA, SGA, SXGA & USGA Formats (640x480 to 1600x1200x60Hz)
- HDTV Resolutions of 480p, 720p, 1080i & 1080p
- Video Input/Output Format Conversion Between RGBHV, DVI & RGsB
- Uses All-Digital Processing & Transmission for Crystal-Clear Signals and No Color Skewing
- No Video Compression – Real-Time Video Transmission for Exceptional Quality & Resolution
- Requires No Adjustments, Equalization or De-Skewing
- Standard DVI-I Video Connector with Adapter Included for Standard VGA Interface
- USB 2.0 4-port Hub for Keyboard, Mouse, External HDD and Other USB Peripheral Devices
- Wide Optical Dynamic Range: Eliminates Need for Optical Attenuators
- Multimode Laser Based Systems

DESCRIPTION:

Meridian's RGB-T/R-101 product is part of Meridian's DigiView product family and is a state-of-the-art, cost-effective, high performance Video/USB/Audio/Keyboard/Mouse transmission system that transports the following signals: 1-ch fully-compliant DVI, RGBHV, or RGsB signal over one multimode fiber and keyboard, mouse and 2-ch audio (input/output) over a second, multimode fiber using a standard USB 2.0 transport medium. At the transmit side, the USB interface connects directly to a standard USB 2.0 port on your computer and provides a 4-port USB 2.0 hub at the receive side. Four USB ports can be used to connect your computer keyboard, mouse or other USB 2.0 device such as a flash drive or external HDD. The fourth of the USB ports can also be switched to transmit the computer audio output and line input channels and provides them on standard 3.5mm stereo phone jacks on the receive unit. The supplied video adapter allow easy interface to standard VGA connectors on computers and monitors. The RGB-T/R-101 provides real-time, digitized transmission of the RGB and H&V sync signals. Because it transmits signals in real-time, no video information is lost and is a perfect solution for dynamic video signals with crystal clear video and no color pixel skewing.

You can also use the video channel to convert between the various video formats. For example, the input could be an RGBHV signal from a standard computer while the output device might be a DVI or RGsB monitor.

The user can further enhance the video performance with the use of the video computer USB interface. The data channel allows the user to adjust brightness, contrast, H&V position, picture sharpness, color, etc. It also allows you to customize the unit for non-standard video resolutions and refresh rates.

CONFIGURATIONS:

This RGB-T/R-101 product is available as rack mount cards and modules that can be installed in either Meridian's desk chassis or in 19" racking frames. This product requires two standard single slots and can be made into a stand-alone system with the addition of the SR-1000/s, 2 slot desk/wall mount chassis (87 VAC- 264VAC)

MARKETS:

- ✓ Courtrooms
- ✓ Medical & MRI displays
- ✓ Residential
- ✓ Secure computer installations
- ✓ Stock exchanges
- ✓ Video walls
- ✓ CAD / CAM

SPECIFICATIONS:

Video

Number of Video Channels	1 of DVI, RGB (sync-on-green) or RGBHV (TTL H & V sync)
Horizontal Scan Rate	30kHz to 130kHz (auto sensing)
Vertical Scan Rate	60-150Hz (auto sensing)
SNR	>60dB
Resolution Range.....	640x480x60 to 1600x1200x75
HDTV Resolution supported ..	480p, 720p (RGB/DVI) 1080i, 1080p (DVI only)
RGB Processing	24-bits, no compression or scaling
Input Impedance/Level	RGB: 75 Ω / 714 mV p-p, H&V 3-5V p-p, 1V p-p w/S.O.G

Audio

In/Out Impedance	47 KOhm Unbalanced
Frequenct Response	10Hz to 18KHz
SNR	>80dB (Weighted) @ 1KHz.
In / Out Level	0 dBm (1VP-Pmax.)
Total Harmonic Distortion	< 0.02% @ 1 KHz
Resolution	16 Bit

Optical

Number of fibers	2
Fiber type	Multimode (62.5 or 50um)
Wavelength	850nm band
Operating distance	Up to 1km (50um fiber)* Up to 500m (62.5um fiber)*

Enviromental

Operating Temperature	-10°C to +50°C
Storage Temperature	-55°C to +85°C
Relative Humidity	0 to 95% Non-condensing

Connectors

Video	DVI-I (female) HD-15 female (on dongle)
Audio	3.5mm Phone Jack
Optical	ST (two)
USB	4-pin USB (type B)
Power	See SR series chassis for details

Indicators (LEDs)

Power	Green
Diagnostic	Green (OK), Red (alarm)
Tx carrier	Green (OK), Red (alarm)
Rx carrier	Green (OK), Red (alarm)
DVI active	Green
RGB active	Green
SHV (sync H&V)	Green
SOG (sync on green)	Green
USB active	Green (Rx-Data), Red (Tx-Data)
Audio Present	Green (2)
Audio Overload	Red (2)

Physical

Dimensions (2 Cards)	160 mm (6.3") L, 127 mm (5") W 40mm (1.60") W
Weight	500 gms (26 Oz)
No. of Slots	2
Module	See SR-1000 Brochure

Quality

MTBF	>120,000 hours @ Ground Fix 35°C per MIL217F
------------	---


Power **

Card	7 Watts
------------	---------


* Based on maximum resolution & fiber bandwidth

** Due to variations of drivers and diagnostic options, power shown @ max value

Part Numbers:

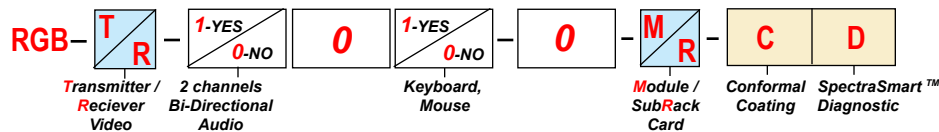

For DVI only products: RGB part of Part numbers should be changed to DVI.

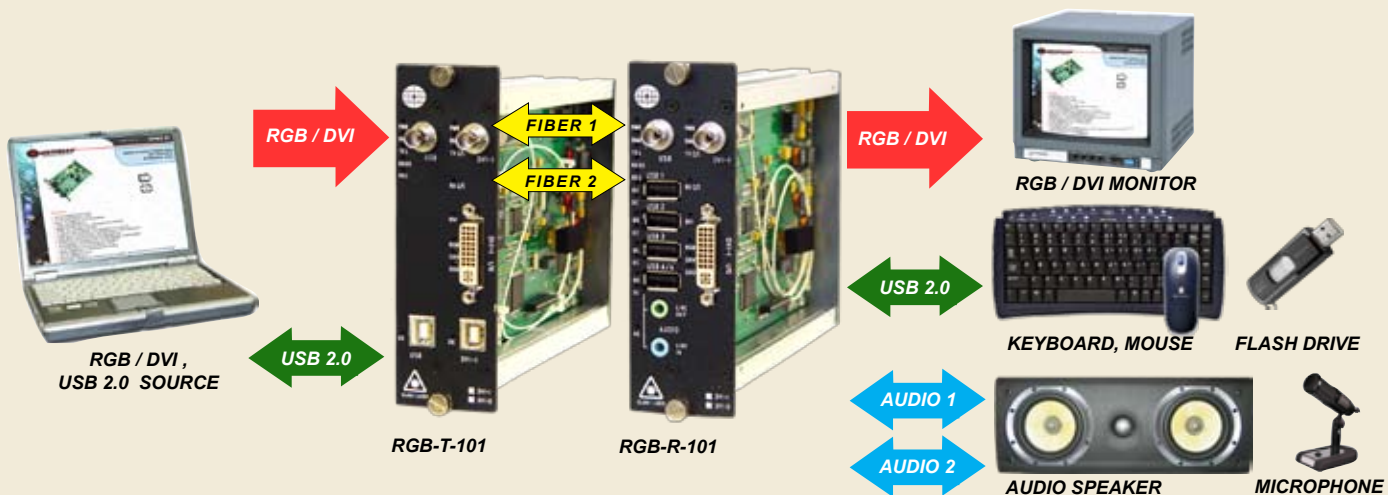

OPTICAL:

Fiber Type/Size (um)	Optical Output (dBm)	Receiver Sensitivity (dBm)	Optical Budget (dB)	Wavelength (nm)	Optical Connector	Optical Dynamic Range (dB)
Multimode (FP Laser) 62.5/125 & 50/125	+2	-8	10	850	ST	15