


Digitally Encoded Two Unidirectional Audio Channels



FEATURES:

- Two Unidirectional Channels of 24 Bit Digitally Encoded Audio over one Fiber
- Laser Based Systems for Multimode and Singlemode Fiber
- Surface Mount Technology (SMT) for High Reliability and Repeatability
- *SpectraSmart* Network Management Compatible
- Local LED Status Indicators to Monitor Critical System Diagnostics and Performance Parameters
- ST, FC Optical Connector
- Hot Swappable Rack Cards
- Back - Biased Photo Detector Circuitry for Stable Optical Laser Output Over Full Temperature Range
- Meets NEMA TS1 / TS2 & CALTRANS Specifications.
- Utilizes Internal Switching Power Supplies
- Automatically Resettable Solid-State Current Limiters on All Power Lines: Provides Equipment Protection
- Wide Optical Dynamic Range: Optical Attenuators are Never Needed
- Screw Terminal Connectors for Audio

DESCRIPTION:

This module in the **DigiSlim™** product family incorporates all-digital encoding technology and transmits/receives two, 24-bit uni-directional audio channels over one optical fiber. Local indicators provide visual operational of each audio channel. Convenient Screw Terminal connectors are used for easy connection of the audio channel interfaces. These single fiber, laser based systems are available in both, Multimode and Singlemode modules. The **DigiSlim™** series is also compatible with Meridian's *SpectraSmart* Network management and diagnostic PC based system. See the *SpectraSmart* brochure for additional details.

CONFIGURATIONS:

The **DigiSlim™** product family is available as rack mount cards and modules that can be installed in any of Meridian's desk chassis or in 19" racking frames. This system can be configured in either star (module to rack) or trunking (rack to rack) configurations. These systems can be transformed in to a standalone module by utilizing an SR-500/S (standard configuration) or an SR-1000/S.

MARKETS:

- ✓ Intelligent transportation systems (ITS)
- ✓ Security and surveillance
- ✓ Access Control

SPECIFICATIONS:

Audio

I/O Impedance	600 Ohm (Bal.), 47 KOhm (Un Bal.)
Frequency Response	10 Hz to 20 KHz
SNR	>90dB (Weighted)@ 1 KHz
In/Out Level	-8 to +8 dBm (4V _{p-p} max.) (+18 dBm available on request)
Total Harmonic Distortion	<0.01% @ 1KHz
Resolution	24 Bit

Optical

Fiber Data Rate	250 Mb/s
-----------------------	----------

Connectors

Video	75 Ohm BNC (Gold Center Pin)
Optical	ST, FC
Power (module)	See SR-500 Brochure for details
Audio	Screw Terminals

Power **

Card	6 Watts
------------	---------

Indicators (LEDs)

1 - Green	Power On
1 - Bi-color	TX Carrier/ Laser Over Current
1 - Bi-color	RX Carrier - Present / Error
2 - Bi-color	Audio Present / Overmodulation

Physical

Dimensions (Card)	160 mm (6.3") L, 127 mm (5") W 20mm (0.80") W
Weight (Card)	450 gms (16 Oz)
No. of Slots	1
Module	See SR-500 Brochure

Environmental

Operating Temperature ...	-34°C to +74°C
Storage Temperature	-55°C to +85°C
Relative Humidity	0 to 95% Non-condensing



Quality

MTBF	>170,000 hours @ Ground Fix 35°C per MIL217F
------------	---

* measured @ max. optical budget

** Due to variations of drivers and diagnostic options,
power shown @ max value

Part Numbers:

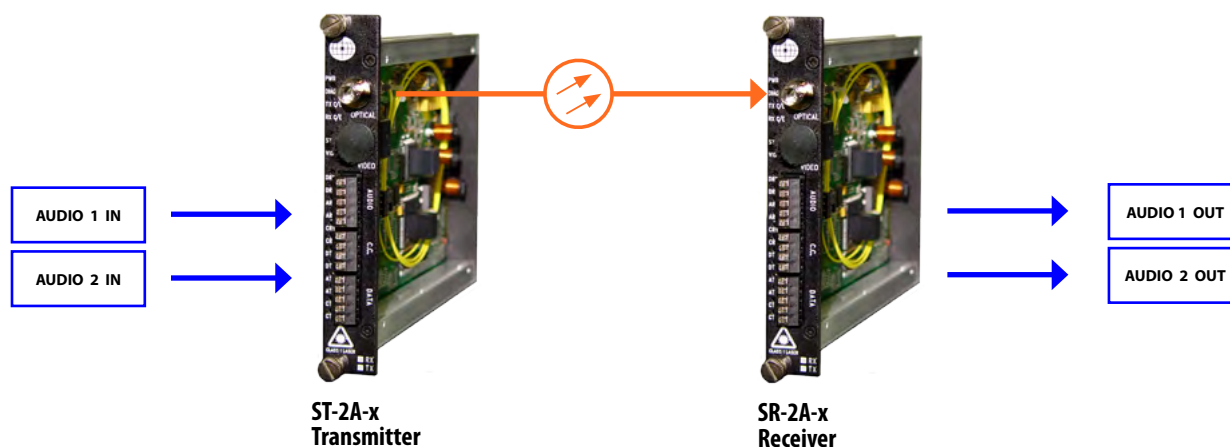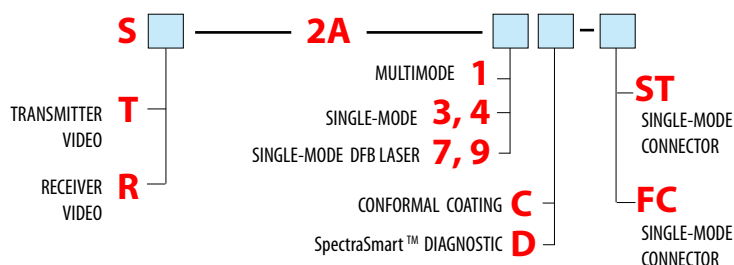

OPTICAL:

Meridian Optical Code	Fiber Type/Size (um)	Optical Output (dBm)	Receiver Sensitivity (dBm)	Optical Budget (dB)	Wavelength (nm)	Optical Connector	Optical Dynamic Range (dB)	Max Distance (Km)
1	Multimode (Laser) 62.5 / 125	-5	-26	21	1300	ST	26	7
3	Singlemode (FP Laser) 9 / 125	-5	-26	21	1310	ST, FC	26	60
4	Singlemode (FP Laser) 9 / 125	-5	-26	21	1550	ST, FC	26	80
9	Singlemode (DFB Laser) 9 / 125	+1	-26	27	1310	ST, FC	26	75
7	Singlemode (DFB Laser) 9 / 125	+1	-26	27	1550	ST, FC	26	100

Meridian Technologies Inc.

700 Elmont Road. • Elmont, NY 11003 • 516. 285. 1000 • FAX 516. 285. 6300 • E-mail sales@meridian-tech.com
www.meridian-tech.com

ver 02/2018 D