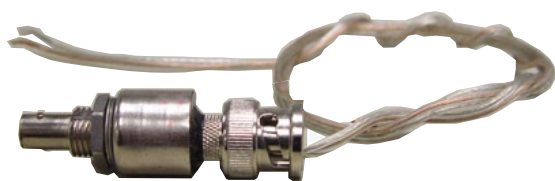


**Fiber Optic IM Video
Micro Transmitter
with BNC Connector****FEATURES:**

- Compact Size
- Attaches to Camera
- 26dB Budget
- 34 dB Dynamic Range (AGC)
- Surface Mount Technology (SMT) for High Reliability and Repeatability
- ST™ Connector
- 15 MHz Video Bandwidth
- Meets EIA RS-170, RS-343A
- 12 VDC Power Supply
- Compatible with All NTSC, PAL, or SECAM Systems
- Wide Optical Dynamic Range: Optical Attenuators are Never Required
- BNC Video Connector
- Compatible with 100M Series (Module)
- Compatible with 130R Series (Rack)

DESCRIPTION:

The PT 100uB is a State-of-the-Art, LED based, Intensity Modulated, fiber optic video system that transmits a real time B&W or color video signal over multimode fiber up to 6 Km. This compact unit is PAL, SECAM, and NTSC compatible and operates at 850nm (1300nm models are also available). The PT 100uB mounts directly into the CCTV camera and is the product of choice for Original Equipment (OEM) Manufacturers and Systems Integrators.

CONFIGURATIONS:

PT 100uB transmitters are suitable for both pressurized and non-pressurized camera housings and can be combined with either the PR-100M modules or PR-100R card receivers for point-to-point and star applications. Its high Dynamic range supports both 50 and 62.5 micron fibers.

APPLICATIONS:

- ✓ Security and Surveillance
- ✓ Access Control
- ✓ Robotics Vision and Medical Imaging

SPECIFICATIONS:

Video

Format NTSC, PAL, SECAM
Voltage/Impedance 1 Vp-p, 75 Ohm, 1.5 Vp-p max.
Bandwidth 5 Hz to 15 MHz @ -3 dB
Differential Gain <2% typical
Differential Phase <2° typical
SNR 67 dB weighted*
Return Loss >30 dB
Field Tilt <0.5% max.

Connectors

Video BNC Male
Optical ST™
Power Harness cable 12”

Power**

Transmitter Module 50 mA @ 12 VDC

Physical

Dimensions:
PT-100u 38 mm (1.5”)L, 13 mm (0.5”)Dia.
Weight:
PT-100u 28 g (1 oz.)


Environmental

Operating Temperature. -30°C to +60°C
Storage Temperature. -50°C to +85°C
Relative Humidity. 0 to 95% Non-condensing

Quality

MTBF. >230,000 hours @ Ground Fix
. 35°C per MIL217F

* As per RS-250C, measured @ 1Km (multimode), @ 10Km (singlemode)

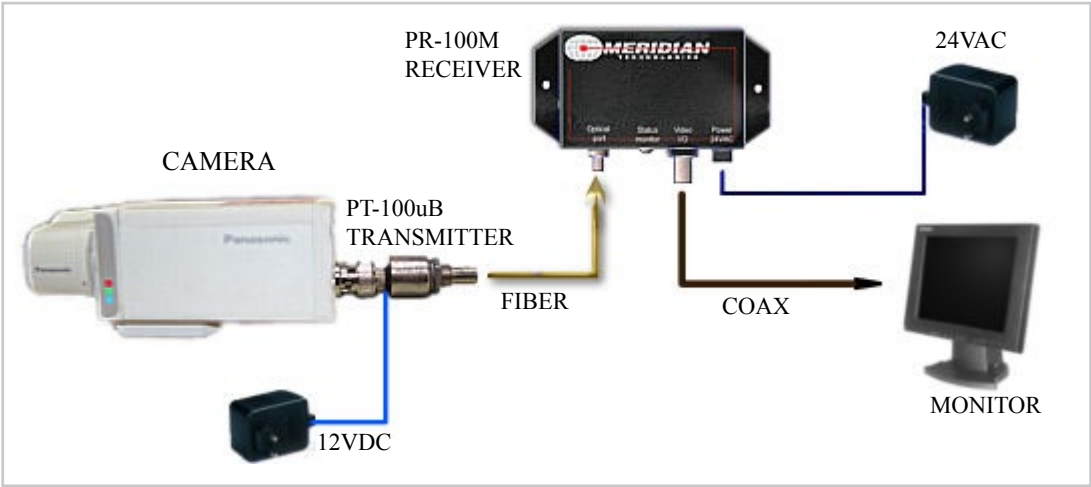

OPTICAL:

Fiber Type/Size (um)	Optical Output (dBm)	Receiver Sensitivity (dBm)	Optical Budget (dB)	Wavelength (nm)	Optical Connector	Optical Dynamic Range (dB)	Max Distance (Km)
Multimode* (SLED) 50 / 125	-21	-44	23	850	ST	34	4.9
Multimode* (SLED) 50 / 125	-19	-44	25	1300	ST	34	5.4
Multimode* (SLED) 62.5 / 125	-18	-44	26	850	ST	34	5.6
Multimode* (SLED) 62.5 / 125	-16	-44	28	1300	ST	34	6.0

* Distance is limited to fiber loss and splices