


CONFIGURATION BACKUP/RESTORE UNIT FOR DigiNet™ DEVICES




CONFIGURATION
BACKUP / RESTORE UNIT

FEATURES

- Configuration Backup and Restore for DigiNet™ devices
- DB9/RJ45/M12 connector provided
- Portable design, no power supply needed
- Effortless backup and Restore operation
- DIN-Rail and Wall-mount enabled
- Plug and Play operation

DESCRIPTION

CB1 series is a standalone configuration backup unit that can be used for backup/restore DigiNet™ devices configuration without utilizing any additional hardware. It powered by the console port of compatible DigiNet device without external power supply. Backup or Restore functions on CB1 easily selected by DIP-switch setting.

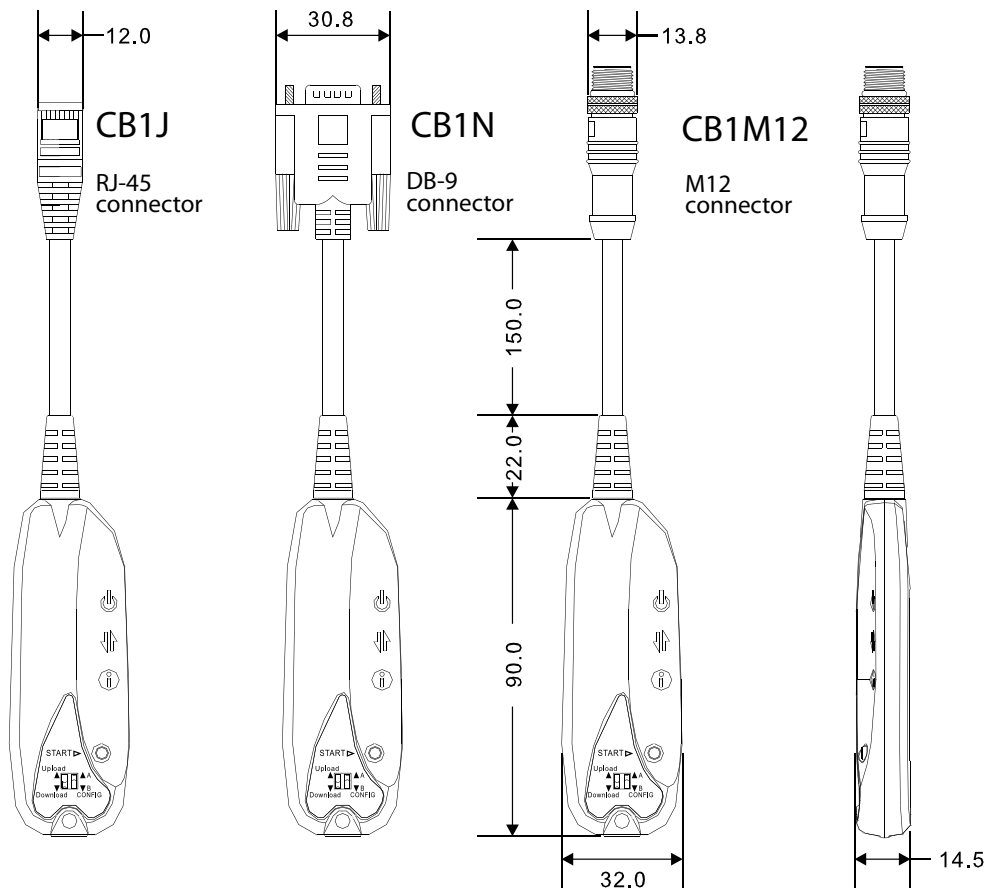

units = mm

SPECIFICATIONS

Model	CB1N		CB1J	CB1M12
Physical Ports				
Connector	DB9		RJ-45	M12(5pin A-coding)
Switch	2 pole DIP switch			
LED Indicators				
Power indicator	1 x LED	Green : Power is on and device ready		
Transmit indicator	1 x LED	Amber blinking: data transmitting		
Status indicator	1 x LED	Green : function successful	Red : function fail	
Power				
Input Power	5~12VDC (via RS-232 RTS port)			
Physical				
Enclosure	IP-40, PC molding			
Dimensions (W x D x H)	32(W)x14.5(D)x90(H)mm (1.25 x 0.57 x 3.5 inch.) (cable length:172mm)			
Weight	53g (0.12 lb.)		33g (0.73 lb.)	43g (0.1 lb.)
Environmental				
Storage Temperature	-40 to 85°C (-40 to 185°F)			
Operating Temperature	-10 to 60°C (14 to 140°F)			
Operating Humidity	5% to 95% Non-condensing			
Environmental				
Storage Temperature	-40 to 85°C (-40 to 185°F)			
Operating Temperature	-10 to 60°C (14 to 140°F)			
Operating Humidity	5% to 95% Non-condensing			
Regulatory approvals				
EMI	FCC Part 15, CISPR (EN55022) class A			
EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11			

Ordering Information		Packing List	
Model Name	Description		
CB1N	Configuration Backup Unit for DigiNet™ devices, DB-9 connector	CB1 unit	1
CB1J	Configuration Backup Unit for DigiNet™ devices, RJ-45 connector		
CB1M12	Configuration Backup Unit for DigiNet™ devices, M12 connector	Quick Installation Guide	1