

DT-2V(W)4A2L/2L-X

PINOUT DIAGRAM

STATUS INDICATORS

1. POWER (GREEN)
2. NA

STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)

VIDEO INPUT (CH.1)

STATUS INDICATORS


1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

AUDIO INPUT (PORT 3) (DB-9 FEMALE)

1. (CH.1) INPUT-
2. (CH.1) INPUT+
3. (CH.2) INPUT-
4. (CH.2) INPUT+
5. GND
6. (CH.3) INPUT-
7. (CH.3) INPUT+
8. (CH.4) INPUT-
9. (CH.4) INPUT+

DATA TTL IN/OUT (PORT 4) (DB-15HD FEMALE)

1. (CH.1) INPUT
2. (CH.2) INPUT
3. NA
4. NA
5. GND
6. NA
7. (CH.1) OUTPUT
8. NA
9. (CH.2) OUTPUT
10. NA
11. NA
12. NA
13. NA
14. NA
15. NA

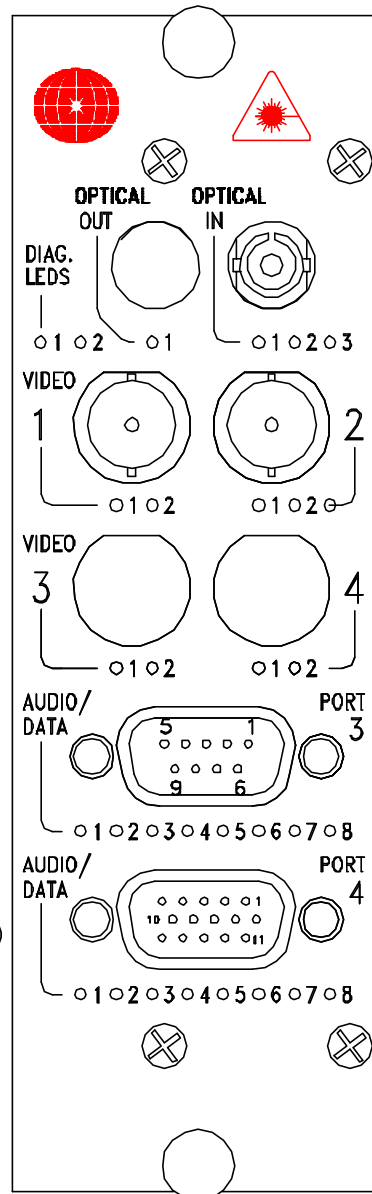

OPTICAL PORT

STATUS INDICATORS

1. NA
2. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
3. RX CARRIER (GREEN)/ERROR (RED)

VIDEO INPUT (CH.2)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

STATUS INDICATORS (PORT 3)


1. (CH.1) AUDIO INPUT PRESENT
2. (CH.1) AUDIO INPUT OVERLOAD
3. (CH.2) AUDIO INPUT PRESENT
4. (CH.2) AUDIO INPUT OVERLOAD
5. (CH.3) AUDIO INPUT PRESENT
6. (CH.3) AUDIO INPUT OVERLOAD
7. (CH.4) AUDIO INPUT PRESENT
8. (CH.4) AUDIO INPUT OVERLOAD

STATUS INDICATORS (PORT 4)

1. (CH.1) INPUT PRESENT
2. (CH.1) OUTPUT PRESENT
3. (CH.2) INPUT PRESENT
4. (CH.2) OUTPUT PRESENT
5. NA
6. NA
7. NA
8. NA

DR-2V(W)4A2L/2L-X

PINOUT DIAGRAM

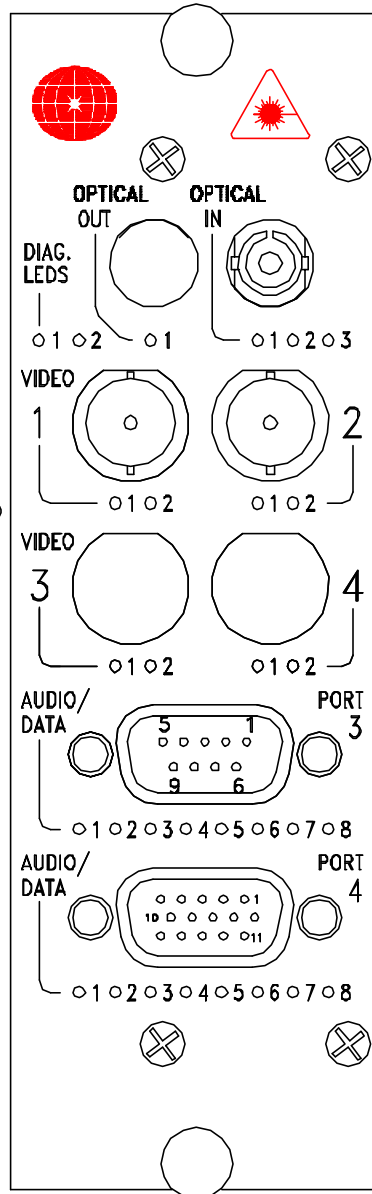

STATUS INDICATORS

1. POWER (GREEN)
2. NA

STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)

VIDEO OUTPUT (CH.1)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

AUDIO OUTPUT (PORT 3) (DB-9 FEMALE)

1. (CH.1) OUTPUT-
2. (CH.1) OUTPUT+
3. (CH.2) OUTPUT-
4. (CH.2) OUTPUT+
5. GND
6. (CH.3) OUTPUT-
7. (CH.3) OUTPUT+
8. (CH.4) OUTPUT-
9. (CH.4) OUTPUT+

DATA TTL IN/OUT (PORT 4) (DB-15HD FEMALE)

1. (CH.1) INPUT
2. (CH.2) INPUT
3. NA
4. NA
5. GND
6. NA
7. (CH.1) OUTPUT
8. NA
9. (CH.2) OUTPUT
10. NA
11. NA
12. NA
13. NA
14. NA
15. NA

OPTICAL PORT STATUS INDICATORS

1. NA
2. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
3. RX CARRIER (GREEN)/ERROR (RED)

VIDEO OUTPUT (CH.2)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

STATUS INDICATORS (PORT 3)

1. (CH.1) AUDIO OUTPUT PRESENT
2. (CH.1) AUDIO OUTPUT OVERLOAD
3. (CH.2) AUDIO OUTPUT PRESENT
4. (CH.2) AUDIO OUTPUT OVERLOAD
5. (CH.3) AUDIO OUTPUT PRESENT
6. (CH.3) AUDIO OUTPUT OVERLOAD
7. (CH.4) AUDIO OUTPUT PRESENT
8. (CH.4) AUDIO OUTPUT OVERLOAD

STATUS INDICATORS (PORT 4)

1. (CH.1) INPUT PRESENT
2. (CH.1) OUTPUT PRESENT
3. (CH.2) INPUT PRESENT
4. (CH.2) OUTPUT PRESENT
5. NA
6. NA
7. NA
8. NA