


One Channel Digital Video Transmitter, Two Full Duplex Audio, Two B-directional Contact Closures and One Bi-directional TTL Data

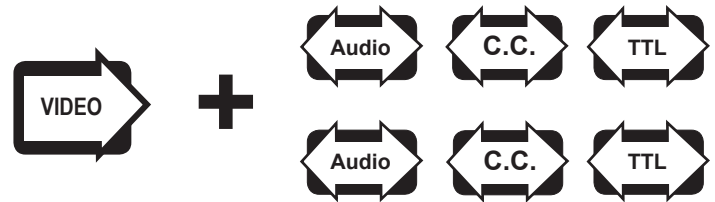

FEATURES:

- 8-Bit Video Digital Encoding
- Real Time Video / 24-Bit Audio / Contact Closures/ TTL Data
- 7 MHz Video Bandwidth
- Meets RS-250C Short Haul Transmission Specifications
- NTSC, PAL, SECAM Compatible
- Wide Optical Dynamic Range: Eliminates Need For Optical Attenuators
- Laser Based Systems for Multimode and Singlemode
- Surface Mount Technology (SMT) for High Reliability and Repeatability
- SpectraSmart™ Network Management Compatible
- Local LED Status Indicators to Monitor Critical System Diagnostics for Performance Parameters
- ST, FC Optical Connector
- Hot Swappable Cards
- Laser Back - Biased Photo Detector Circuitry for Stable Optical Output Over Full Temperature Range.
- 75 Ohm BNC Video Connector (Gold Center Pin)
- Meets EIA RS-170, RS-343A Formats
- DB 9 Type Connector for Audio and TTL Data
- DB 9 (HD) connector for Contacts

DESCRIPTION:

The DT/DR-1V2A2C1L/2A2C1L-x series products incorporate digital encoding technology. This fiber optic module transmits one real-time, high performance, 8-bit digitally encoded Video signal, 2 bi-directional (full-duplex) 24-bit Audio, 2 bi-directional contact closures and 1 full-duplex TTL data channel over one multimode or singlemode fiber. Meridian's digital product line incorporates plug-in personality signal cards to easily configure a wide variety of module types. The functionality of the DT/DR-1V2A2C1L/2A2C1L-x series products is enhanced by their compatibility with Meridian's PC based SpectraSmart Network Management&Diagnostic Software system. SpectraSmart supervises the operating parameters of the transmission system such as the status on video levels, sync, digital carrier detect, voltages, temperatures, optical levels etc. See SpectraSmart brochure for further details.

CONFIGURATIONS:

The DT/DR-1V2A2C1L/2A2C1L-x product family is available as rack mount cards and modules that can be installed in Meridian's card chassis, desk chassis and 19" racking frames. This system can be configured in either star (module to rack) or trunking (rack to rack) configurations. These systems can be made a standalone system by using the SR-1000/s, 2 slot desk / wall mount chassis (87VAC-264VAC)

MARKETS:

- ✓ Access Control
- ✓ Security and surveillance
- ✓ Intelligent transportation systems (ITS)

SPECIFICATIONS:

Video

Format	NTSC, PAL, SECAM
Voltage/Impedance	1 Vp-p, 75 Ohm, 1.5 Vp-p max.
Bandwidth	5 Hz to 6.8 MHz @ -3 dB
Differential Gain	<0.6%
Differential Phase	<0.3°
SNR	>60 dB (weighted)*
Return Loss	>30 dB
Field Tilt	< 0.5%

Contact Closure

Format	Contact Closure
Rate	10 Hz.(Per Channel)
Contact Rating	0.3A, 30V AC / DC
Contact Bounce Time	5 ms

Audio

I/O Impedance	600 Ohms (Bal. / Un Bal.)
Frequency Responce	10 Hz to 20 KHz
SNR	>90dB (Weighted)@ 1 KHz
In/Out Level	-8 to +8 dBm (4V _{p-p} max.) (+18 dBm available on request)
Total Harmonic Distort	<0.01% @ 1KHz
Resolution	24 Bit

Data

Formats	TTL
Data Rate	DC to 125 Kb/s
Bit Error Rate	10 ⁻⁹

Optical

Fiber Data Rate	750 Mb/s
-----------------	----------

Connectors

Video	75 Ohm BNC (Gold Center Pin)
Optical	ST, FC
Power	See SR-1000 Brochure for details
Audio/Data	DB9 Female
Contacts	DB9 (HD) Female

MODEL NO:

DT-1W1A2C/1A2C-2	..Transmitter, MM, 850/1300 nm Laser
DT-1W1A2C/1A2C-5	..Transmitter, SM, 1310/1550 nm Laser
DT-1W1A2C/1A2C-8	..Transmitter, SM, 1310/1550 nm DFB Laser
DR-1W1A2C/1A2C-2	.Receiver, MM, 850/1300 nm, Laser
DR-1W1A2C/1A2C-5	Receiver, SM, 1310 /1550 nm, Laser
DR-1W1A2C/1A2C-8	.Receiver, SM, 1310/1550 nm, DFB Laser

Power **

Card	8 Watts
------	---------

Indicators (LEDs)

1 - Green	Power On
1 - Bi-color	TX Carrier/ Laser Over Current
1 - Bi-color	RX Carrier - Present / Error
1 - Bi-color	RX optical signal - Present / Absent
1 - Bi-color	Video Present / Overload
1 - Green	Sync. Present
2 - Green	Transmit Contact Closure
2 - Green	Recieve Contact Closure
2 - Green	Transmit Data
2 - Green	Recieve Data
2 - Green	Audio Present
2 - Red	Audio Overload

Physical

Dimensions:	
Card	160 mm (6.3") L, 100 mm (4") W 44 mm (1.7") H
Weight:	
Card	450 gms (16 Oz)
No. of Slots	2

Enviromental

Operating Temperature	-34°C to +74°C
Storage Temperature	-55°C to +85°C
Relative Humidity	0 to 95% Non-condensing


Quality

MTBF	>240,000 hours @ Ground Fix 35°C per MIL217F
------	---

* measured @ max. optical budget

** Due to variations of drivers and diagnostic options, power shown @ max value

Part Numbers:

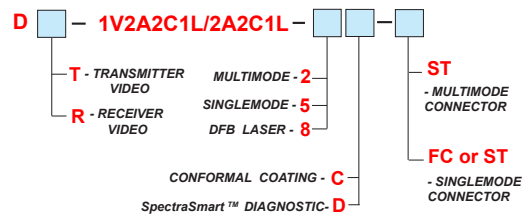

OPTICAL:

Fiber Type/Size (um)	Optical Output (dBm)	Receiver Sensitivity (dBm)	Optical Budget (dB)	Wavelength (nm)	Optical Connector	Optical Dynamic Range (dB)
Multimode (FP Laser) 62.5 / 125	-3	-24	21	1300 / 850	ST	24
Singlemode (FP Laser) 9 / 125	-3	-24	21	1310 / 1550	ST, FC	24
Singlemode (DFB Laser) 9 / 125	+3	-24	27	1310 / 1550	ST, FC	24

Meridian Technologies Inc.

700 Elmont Road. • Elmont, NY 11003 • 516. 285. 1000 • FAX 516. 285. 6300 • E-mail sales@meridian-tech.com
Visit our web side: www.meridian-tech.com

ver 10/2010 A