


Digital 2 Channel Video Multiplexer with Two Full Duplex RS-422, Manchester or Bi-Phase

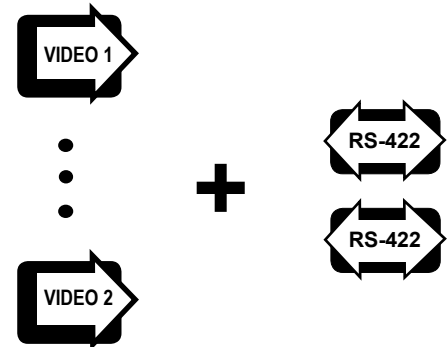

FEATURES:

- Standard 8 Bit Video Digital Encoding
- 2 Real-Time video signals w/ 2 full duplex data channels
- Supports RS-422, Manchester or Bi-Phase
- 7 MHz video bandwidth
- Meets RS-250C transmission specifications
- NTSC, PAL, SECAM compatible
- Wide Optical Dynamic Range: Eliminates need for optical attenuators
- Laser based systems for Multimode and Singlemode
- Surface Mount Technology (SMT) for high reliability and repeatability
- SpectraSmart™ Network Management compatible
- Local LED status indicators to monitor critical system diagnostics for performance parameters
- Hot swappable cards
- Laser Back - Biased Photo Detector Circuitry for stable optical output over full temperature range.
- Meets NEMA TS1 / TS2 & CALTRANS Specifications.
- 75 Ohm BNC video connector (gold center pin)
- Meets EIA RS-170, RS-343A formats
- DC to 1 Mb/s data rate

DESCRIPTION:

The DT/DR-2V2F/2F series is a reliable, cost effective, state-of-the-art, one fiber, Bi-directional Digital Video and Data transmission system. This fiber optic system transmits four channels of real-time 8 bit video with two full duplex channels of RS 422, Manchester or Bi-phase data over one Singlemode or Multimode fiber. The DT/DR-2V2F/2F accepts PAL, SECAM, or NTSC formats. The functionality of DT/DR-2V2F/2F series are further enhanced by their compatibility with Meridian's PC based SpectraSmart, Network Management and Remote Diagnostic Software System. SpectraSmart supervises the operating parameters of the transmission system such as status on video levels, sync, carrier detect, voltage, temperature, optical levels, data activity etc. See the SpectraSmart brochure for more details.

Note: 10 bit version available. See DV-2W 2F / 2F series.

CONFIGURATIONS:

The DV-2V 2F / 2F product family is available as rack mount cards and modules that can be installed in all of Meridian's card chassis, desk chassis and 19" racking frames. This system can be configured in either star (module to rack) or trunking (rack to rack) configurations. These systems can be made a standalone system by using the SR-1000/s, 2 slot desk / wall mount chassis (87VAC-264VAC)

MARKETS:

- ✓ Security and Surveillance
- ✓ Intelligent Transportation System (ITS)
- ✓ Access Control Systems
- ✓ Campus Lecture Networks
- ✓ Pro. Video / Audio

SPECIFICATIONS:

Video

Format	NTSC, PAL, SECAM
Voltage/Impedance	1 Vp-p, 75 Ohm, 1.5 Vp-p max.
Bandwidth	5 Hz to 6.8 MHz @ -3 dB
Differential Gain	<0.6%
Differential Phase	<0.3°
SNR	>60 dB (weighted)
Return Loss	>30 dB
Field Tilt	< 0.5%

Data

Formats	RS-422, Manchester, Bi-Phase
Rate	DC to 1Mb/s
Bit Error Rate	10 ⁻⁹

Optical

Fiber Data Rate	500 Mb/s
-----------------	----------

Connectors

Video	75 Ohm BNC (Gold Center Pin)
Optical	ST, FC
Power	See SR-1000 Brochure for details
Data	DB9 Female

Power **

Card	9 Watts
------	---------

Part Numbers:

DT-2V 2F/ 2F-2. . . . Transmitter, 850nm/ 1300nm, MM, Laser	DR-2V 2F/ 2F-2. . . Receiver, 1300nm/ 850nm, MM, Laser
DT-2V 2F/ 2F-5. . . . Transmitter, 1310nm/1550nm, SM, Laser	DR-2V 2F/ 2F-5. . . Receiver, 1550nm/1310nm, SM, Laser
DT-2V 2F/ 2F-8. . . . Transmitter, 1310nm/1550nm, SM, DFB Laser	DR-2V 2F/ 2F-8. . . Receiver, 1550nm/1310nm, SM, DFB Laser

NOTE: ADD THE SUFFIX "F" FOR ENVIRONMENTAL CONFORMAL COATING AND THE SUFFIX "D" FOR PC BASED DIAGNOSTIC OPTIONS AT THE END OF THE PART NUMBER.

Indicators (LEDs)

1 - Green	Power On
1 - Bi-color	TX Carrier/ Laser Over Current
1 - Bi-color	RX Carrier - Present / Error
1 - Bi-color	RX optical signal - Present / Absent
4- Green	Sync. Present
4 -Bi-color	Video Present / Overload
4-Green	Data Present

Physical

Dimensions:	
Card	160 mm (6.3") L, 100 mm (4") W 44 mm (1.7") H
Weight:	
Card	450 gms (16 Oz)
No. of Slots	2

Environmental

Operating Temperature	-34°C to +74°C
Storage Temperature	-55°C to +85°C
Relative Humidity	0 to 95% Non-condensing

Quality

MTBF	>180,000 hours @ Ground Fix 35°C per MIL217F
------	---



OPTICAL:

Fiber Type/Size (um)	Optical Output (dBm)	Receiver Sensitivity (dBm)	Optical Budget (dB)	Wavelength (nm)	Optical Connector	Optical Dynamic Range (dB)
Multimode (FP Laser) 62.5 / 125	-3	-23	20	1300 / 850	ST	23
Singlemode (FP Laser) 9 / 125	-3	-23	20	1310 / 1550	ST, FC	23
Singlemode (DFB Laser) 9 / 125	+3	-23	26	1310 / 1550	ST, FC	23

Meridian Technologies Inc.

700 Elmont Road. • Elmont, NY 11003 • 516. 285. 1000 • FAX 516. 285. 6300 • E-mail sales@meridian-tech.com
Visit our web side: www.meridian-tech.com

ver 04/04