




2 Channels of Bi-directional HDSDI/Multi-rate Video over One Singlemode Fiber



FEATURES:

- 2 Bi-directional channels of Multi-Rate SDI & HD-SDI video over one singlemode fiber
- Real-Time, Uncompressed Video Transmission
- Supports The Following Formats :
 - 19.4 Mbps (SMPTE 310M)
 - 143 To 540 Mbps SMPTE 259M/344M
 - 1.485 Gbps SMPTE 292M HDTV
 - DVB-ASI at 270 Mbps
 - SMPTE 305M SDTI Rates
- Error Free Pathological Pattern Performance
- Rack Mounted Card Units
- Supports Embedded Audio and Metadata Distances in Excess of 30 km
- Wide Dynamic Range: Eliminates Need for Optical Attenuators
- Optional Small, single channel Tx Easily Mounts on the Back of Broadcast Camera
- Available with ST or FC Optical Connectors
- Requires No User Adjustments

DESCRIPTION:

The SXA/SXB-2HD-51/57 system is a part of Meridian's DigiView product family and will transmit 2 bi-directional channels of real-time SDI/HDSDI video over one singlemode fiber. Using Coarse Wavelength Division Multiplexing (CWDM) technology, the content details of each video channel are preserved by real-time transmission of each video channel in a compact card format. These serial digital video transmitters & receivers provide broadcast quality transmission of the industry standard range of digital video data rates. The entire electrical and optical subsystems are housed in a standard Meridian 1-slot card design for mounting in any venue, particularly those with space constraints. No user adjustments are needed thus ensuring fast deployment and setup with broadcast quality results. Other signal options are available such as bi-directional transmission of SDI/HDSDI as well as 3G video over one singlemode fiber.

CONFIGURATIONS:

This system is available in standard 1-slot or rack mount cards that can be installed in either Meridian desk/shelf mount chassis or in 19", 3RU racking frames.

MARKETS:

- ✓ Remote broadcast camera links
- ✓ Sporting events, concerts, etc.
- ✓ Media feeds
- ✓ Video production
- ✓ Studio to studio & head end feeds
- ✓ Military information displays
- ✓ Video Transport Systems

SPECIFICATIONS:

Video

Formats	19.4 Mbps (SMPTE 310M) 143 To 540 Mbps SMPTE 259M/344M 1.485 Gbps SMPTE 292M HDTV DVB-ASI at 270 Mbps SMPTE 305M SDTI Rates
Nominal Level	0.8 Vp-p, 1.0 Vp-p max.
Data Rate	19Mb/s - 1.5Gb/s per channel
Impedance	75 Ohm
Gain	Unity
Input Coupling	AC
Return Loss	>15 dB
Jitter (Pattological Data Pattern) ..	< 0.2 UI
Cable Equalization	Automatic 0-200m @ 1.5 Gb/s
Bit-Error Rate (0 to -20dBm).....	10 ⁻¹²

Power **

Card 5 W

Indicators (LEDs)

1 - Green	Power On (TX & RX)
4 - Green	Signal Present (TX)
4 - Green	Laser (TX)
4 - Green	Level 0/-10 dBm (RX)
4 - Green	Level -10/-20 dBm (RX)

Physical

Dimensions (Card)	160 mm (6.3") L, 127 mm (5") W 20mm (0.80") W
Weight (Card)	450 gms (16 Oz)
No. of Slots	1
Module	See SR-500 Brochure

Enviromental

Operating Temperature	-10°C to +50°C
Storage Temperature	-55°C to +85°C
Relative Humidity	0 to 95% Non-condensing

Quality

MTBF	>170,000 hours @ Ground Fix 35°C per MIL217F
------------	---

Connectors

Video	75 Ohm BNC (Gold Center Pin)
Optical	ST, FC




Optical

Wavelengths	1510nm, 1530nm, 1550nm, 1570nm
Output power	3dBm per channel

Part Numbers:

SXA-2HD-51/57 Transceiver, card, singlemode
Tx @ 1510nm & 1530nm, Rx @ 1550nm & 1570nm

SXB-2HD-51/57 Transceiver, card, singlemode
Tx @ 1550nm & 1570nm, Rx @ 1510nm & 1530nm

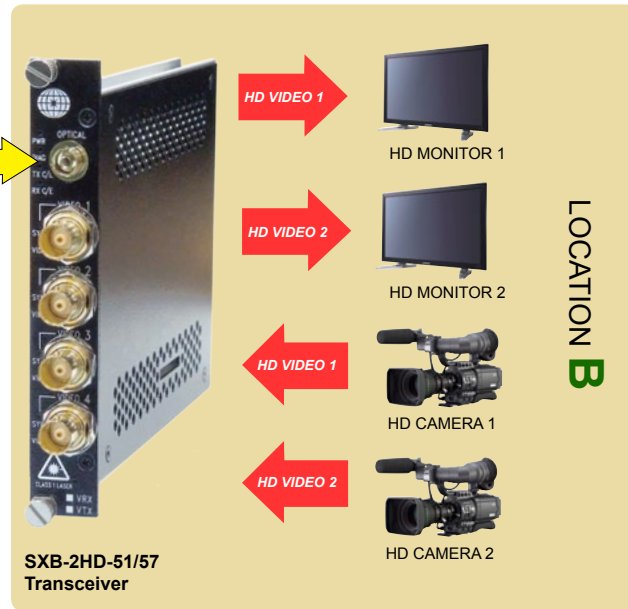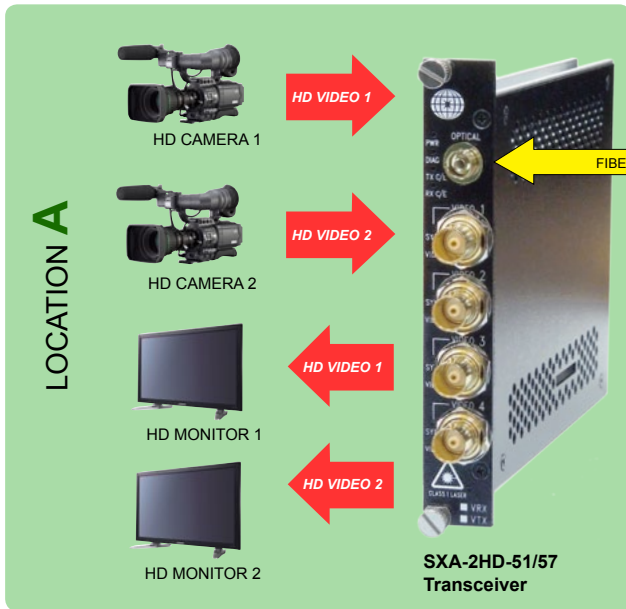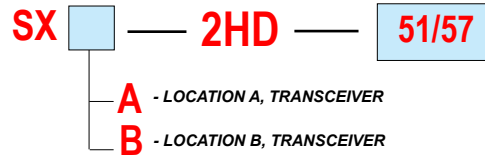

OPTICAL:

Fiber Type/Size (um)	Optical Output (dBm)	Receiver Sensitivity (dBm)	Optical Budget (dB)	Wavelength (nm)	Optical Connector	Optical Dynamic Range (dB)
Singlemode (DFB Laser) 9 / 125	+1 (per channel)	-20	21	1510, 1530, 1550, 1570	ST, FC	20